


CP

同步油缸

CP SYNCHRONOUS CLAMP



CP 外形尺寸

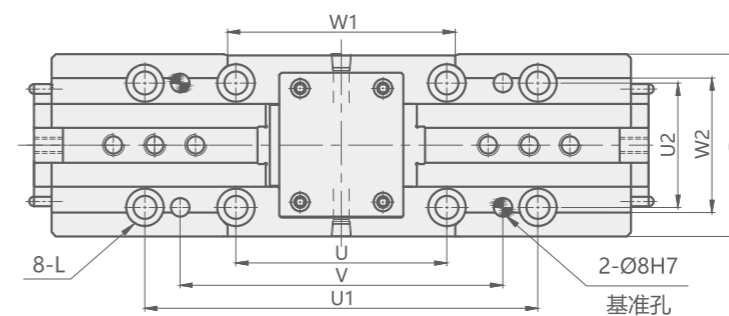

產品特性


曲柄型二滑塊同步油缸,滑塊行程長.
折動面均經硬化及精密研磨,並直接潤滑.
高夾持精度,防塵效果特佳.

最大操作壓力: 35 kgf/cm²
最小操作壓力: 10 kgf/cm²

FEATURES

It's a CRANK type 2 slider synchronous clamp cylinder with long slider stroke.
Matching surface of all parts hardened,ground and lubricated directly.
Construction of high rigidity and high clamping accuracy.

Max. operating pressure 35 kgf/cm²
Min. operating pressure 10 kgf/cm²

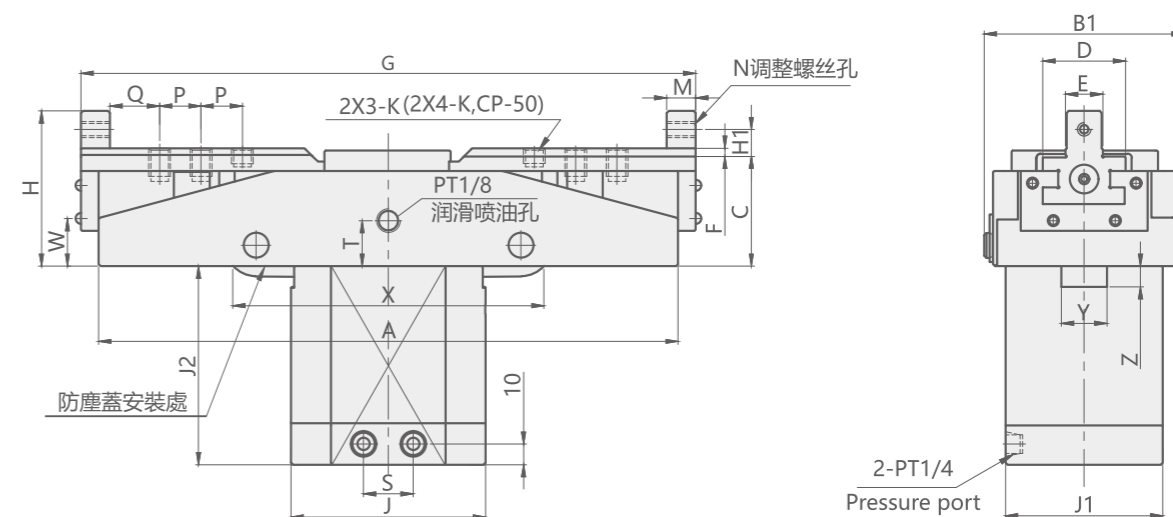

型號Model	CP-20 CP-20W	CP-30A CP-30AW	CP-30 CP-30W	CP-50 CP-50W
推出受壓面積 Eff.piston area clamp (cm ²)	28.27	28.27	28.27	38.48
滑塊行程 Slider stroke (mm)	20	30	30	50
理論夾持力 (35kgf/cm ²) Clamping force at 35kgf/cm ²	1653	1806	1806	2071
使用溫度範圍 Range of temperature(°C)	-10 ~ + 70 (°C)			

使用液體: 普通礦物油基液壓油 (相當於ISO-VG-32)

Recommended ISO-VG-32 hydraulic oil equivalent to ISO viscosity grade

W: 表示防塵蓋

Unit:mm

MODEL	A	B	B1	C	D	E(h6)	F	G		H	H1	J	J1	J2	K	L	M	N
								MAX	MIN									
CP-20	215	88	96	53	40	18	4	249	229	75	13	94	76	83.5	M10xP1.5	M10	12	M6xP1
CP-30A	250	88	96	53	40	18	4	295	265	75	13	94	76	96	M10xP1.5	M10	14	M6xP1
CP-30	280	88	96	53	40	22	4	327	297	75	13	94	76	96	M12xP1.75	M10	14	M6xP1
CP-50	300	110	115	65	50	28	5	369	319	90	15	105	-	120	M12xP1.75	M10	16	M8xP1.25

Unit:mm

MODEL	P	Q	R	S	T	U	U1	U2	V	W	W1	W2	X	Y	Z	含防塵蓋		
																X	Y	Z
CP-20	18	20	66	25	22	102	190	60	156	32	110	65	150	22	4	171	41	7
CP-30A	20	24	96	25	22	102	190	60	156	20	120	65	156	22	6	181	41	15
CP-30	20	24	98	25	22	102	190	60	156	23	110	65	156	22	6	181	41	15
CP-50	21	28	102	30	32	105	230	85	195	22	140	80	180	30	10	184	50	18