



PRECISION LOCKNUTS FOR BEARINGS

www.yinsh.com / www.yinsh.com.tw



PRECISION LOCKNUTS FOR BEARINGS

YSPL series locknuts are a space saving, mechanical design, and the accuracy is suitable for a range of machine tools, carpentry machines, printing machines, and special purpose machines on their spindles, screws, and transmission mechanisms.

YSPL series are fully qualified for your high precision perfect design requirements.

YSPL

Precision Locknuts



Contents

1 - 2	3 - 4	5	6	7	8	9-10	11	12	12
YSLK	YSLR	YSAM	YSMSW	YSFT	YSFTA	AN	YSRN	Notes on Installation	Precision Locknut Applications




Video



YSPL

※ Screws included with this model.

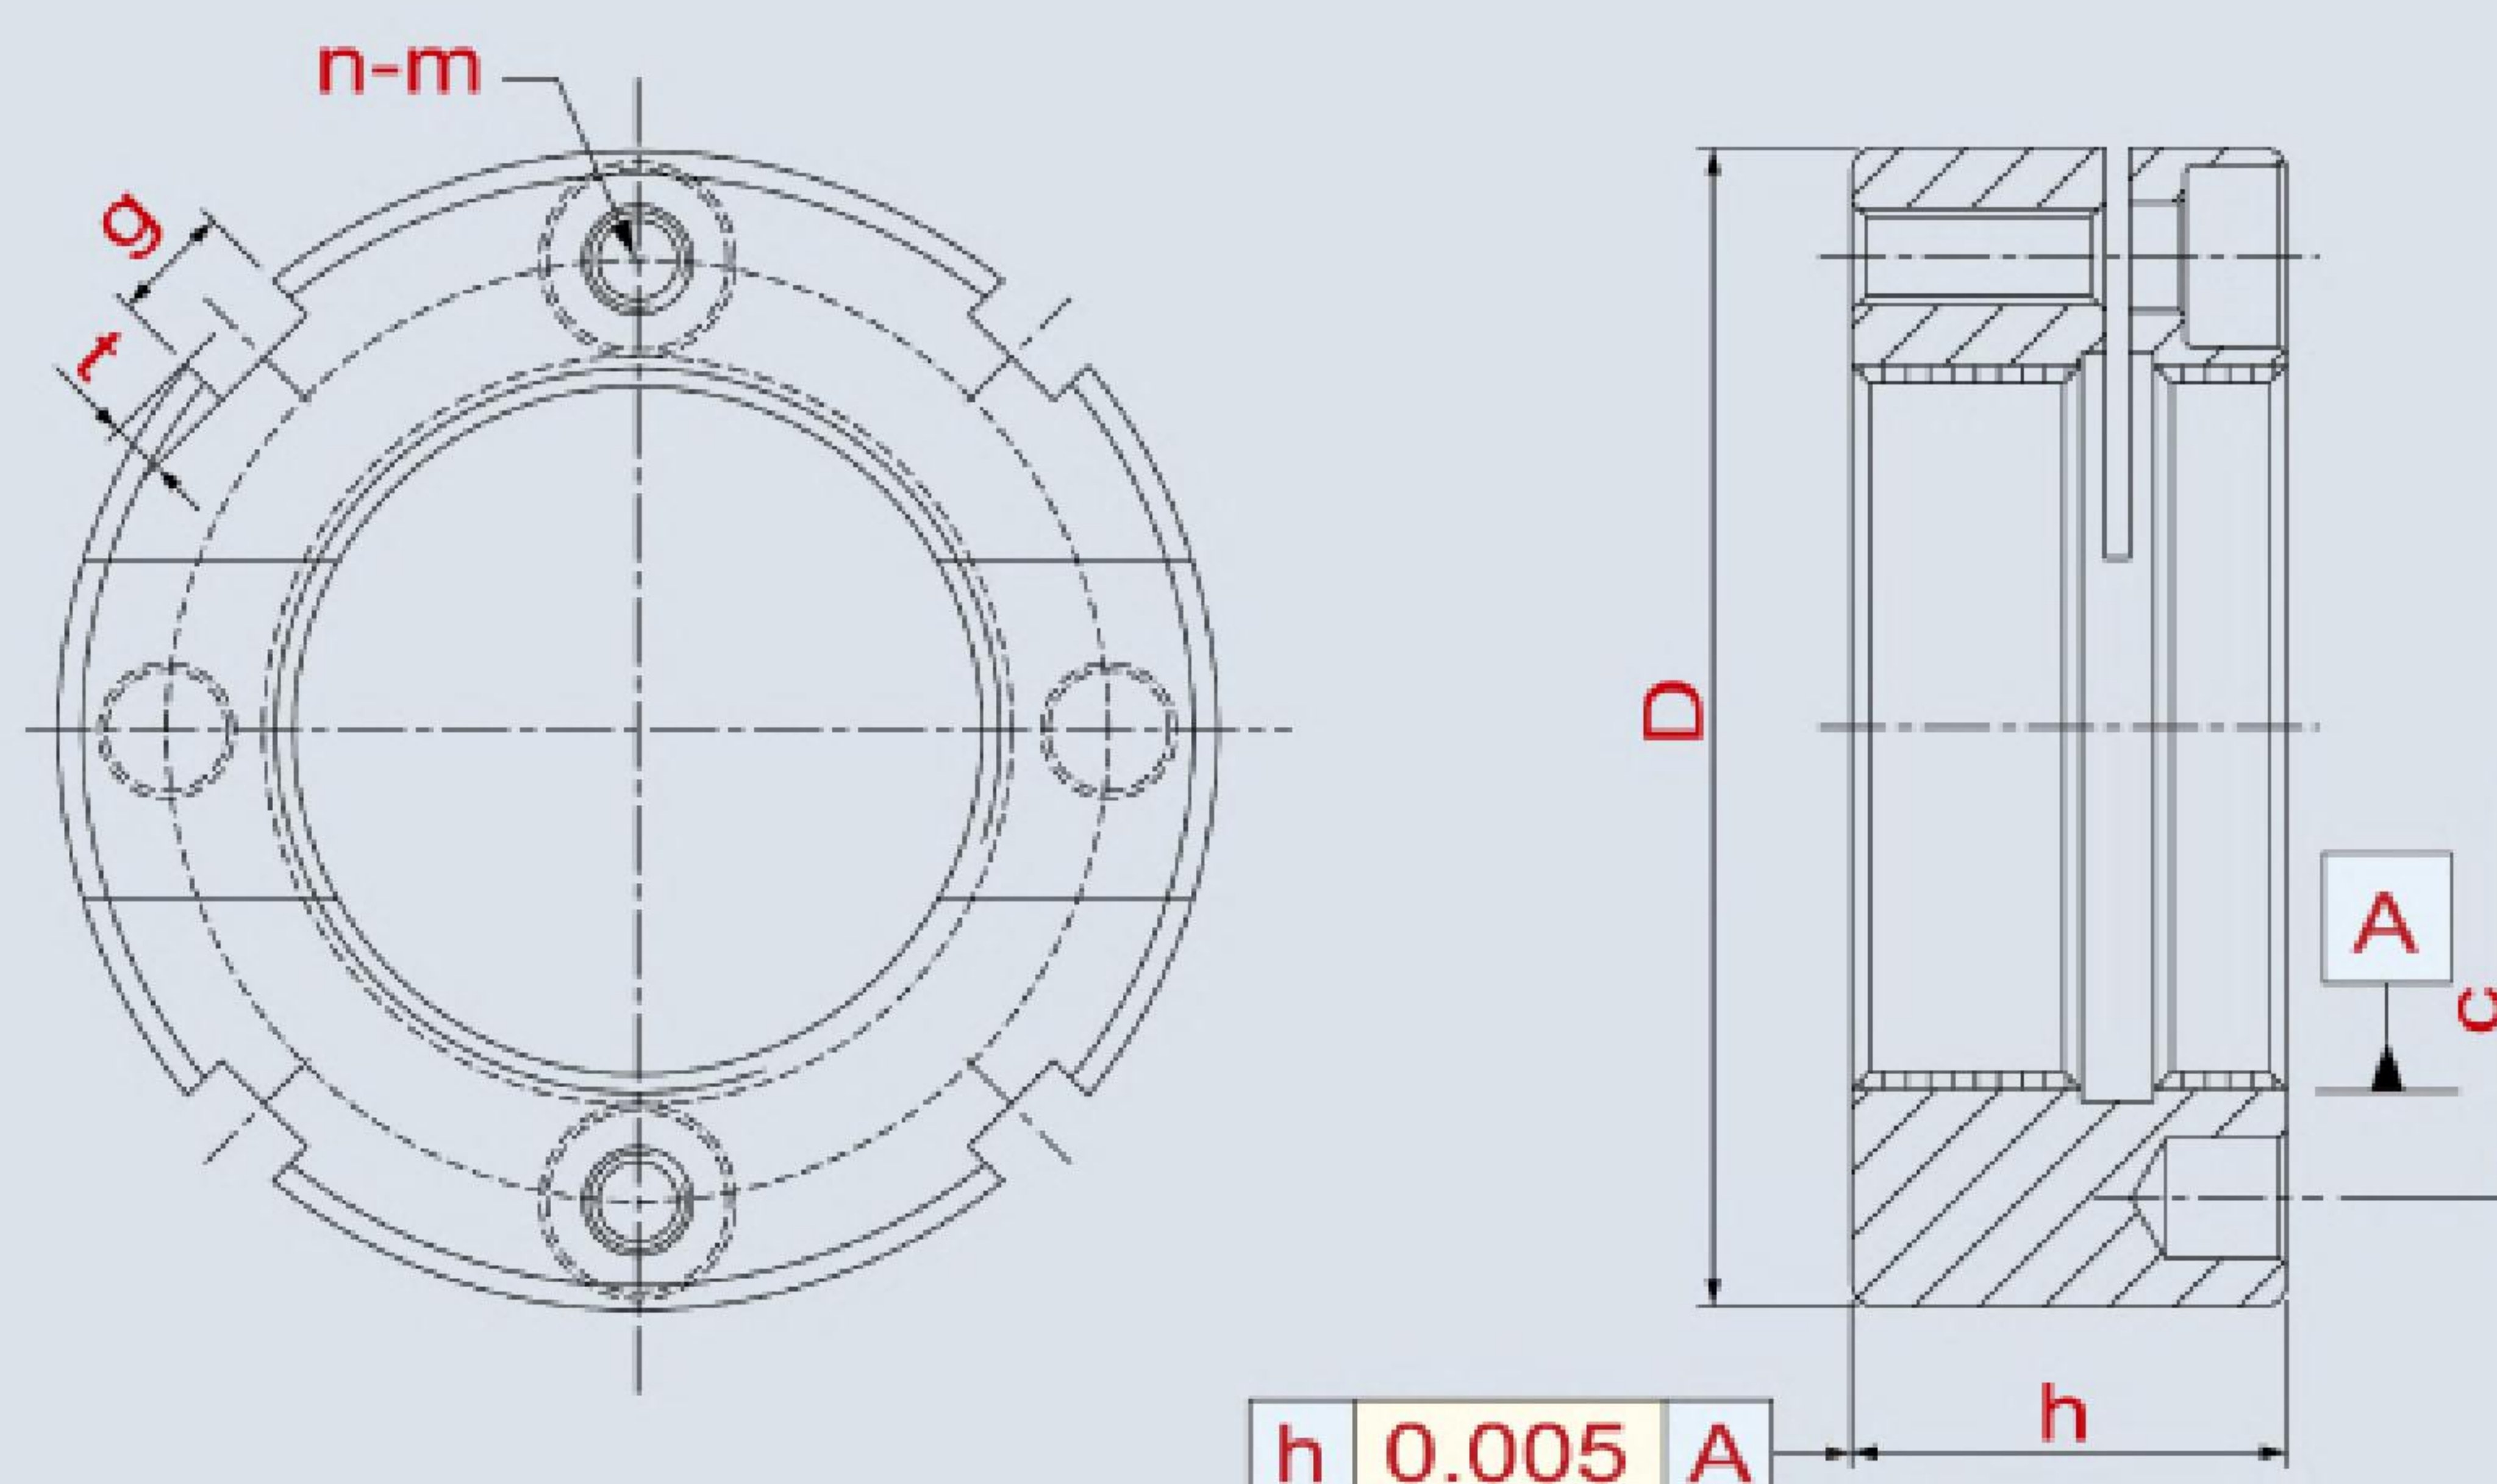

YSLK

Thread	D	h	g	t	n-m	c	n-øb	MAX. Nm
YSLK-M16 x 1.5P	34	14	4	2	2-M4	24	2-Ø4	3.5
YSLK-M17 x 1.0P	37	16	4	2	2-M4	26	2-Ø4	3.5
YSLK-M18 x 1.5P	38	16	4	2	2-M4	28	2-Ø4	3.5
YSLK-M20 x 1.0P	40	16	4	2	2-M4	30	2-Ø4	3.5
YSLK-M20 x 1.5P	40	16	4	2	2-M4	30	2-Ø4	3.5
YSLK-M25 x 1.5P	45	18	5	2	2-M4	35	2-Ø5	3.5
YSLK-M30 x 1.5P	48	18	5	2	2-M4	39	2-Ø5	3.5
YSLK-M35 x 1.5P	53	18	5	2	2-M4	44	2-Ø5	3.5
YSLK-M40 x 1.5P	58	20	6	2.5	2-M4	49	2-Ø5	3.5
YSLK-M45 x 1.5P	68	20	6	2.5	2-M4	57	2-Ø6	3.5
YSLK-M50 x 1.5P	70	20	6	2.5	2-M4	60	2-Ø6	3.5
YSLK-M55 x 1.5P	75	22	7	3	2-M4	65	2-Ø6	3.5
YSLK-M55 x 2.0P	75	22	7	3	2-M4	65	2-Ø6	3.5
YSLK-M60 x 1.5P	84	22	7	3	2-M5	72	2-Ø6	4.5
YSLK-M60 x 2.0P	84	22	7	3	2-M5	72	2-Ø6	4.5
YSLK-M65 x 1.5P	88	22	7	3	2-M5	77	2-Ø6	4.5
YSLK-M65 x 2.0P	88	22	7	3	2-M5	77	2-Ø6	4.5
YSLK-M70 x 1.5P	95	24	8	3.5	2-M5	82	2-Ø7	4.5
YSLK-M70 x 2.0P	95	24	8	3.5	2-M5	82	2-Ø7	4.5
YSLK-M75 x 1.5P	100	24	8	3.5	6-M5	87	2-Ø7	4.5
YSLK-M75 x 2.0P	100	24	8	3.5	6-M5	87	2-Ø7	4.5

YSLK locknut uses steel's elasticity characteristics to securely fix the locking nut in the axial direction. This product is especially suited to space restricted applications, or high contamination working environments where the nut could potentially become loosened more easily.


- Material Composition: SCM440(42CrMo4)
- Hardness: HRC28°~32°
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Turning
- Run Out: 0.005mm



YSLK

Thread	D	h	g	t	n-m	c	n-øb	MAX. Nm
YSLK-M80 x 2.0P	110	24	8	3.5	6-M6	95	2-Ø8	8
YSLK-M85 x 2.0P	115	24	8	3.5	6-M6	100	2-Ø8	8
YSLK-M90 x 2.0P	120	26	10	4	6-M6	105	2-Ø8	8
YSLK-M95 x 2.0P	125	26	10	4	6-M6	110	2-Ø8	8
YSLK-M100 x 2.0P	130	26	10	4	6-M6	115	2-Ø8	8
YSLK-M105 x 2.0P	135	28	10	4	6-M6	120	2-Ø8	8
YSLK-M110 x 2.0P	140	28	10	4	6-M6	125	2-Ø8	8
YSLK-M115 x 2.0P	145	28	10	4	6-M6	130	2-Ø8	8
YSLK-M120 x 2.0P	155	30	12	5	6-M6	136	2-Ø8	8
YSLK-M125 x 2.0P	160	30	12	5	6-M6	140	2-Ø8	8
YSLK-M130 x 2.0P	165	30	12	5	6-M6	148	2-Ø8	8
YSLK-M135 x 2.0P	170	32	12	5	6-M6	153	2-Ø8	8
YSLK-M140 x 2.0P	180	32	12	5	6-M6	160	2-Ø10	8
YSLK-M145 x 2.0P	185	32	12	5	6-M6	165	2-Ø10	8
YSLK-M150 x 2.0P	190	32	12	5	6-M6	170	2-Ø10	8
YSLK-M155 x 2.0P	195	34	14	6	6-M8	175	2-Ø10	18
YSLK-M160 x 3.0P	205	34	14	6	6-M8	178	2-Ø10	18
YSLK-M165 x 3.0P	210	34	14	6	6-M8	184	2-Ø10	18
YSLK-M170 x 3.0P	215	34	14	6	6-M8	193	2-Ø10	18
YSLK-M180 x 3.0P	230	36	16	7	6-M8	205	2-Ø10	18
YSLK-M190 x 3.0P	240	36	16	7	6-M8	215	2-Ø10	18
YSLK-M200 x 3.0P	245	38	16	7	6-M8	223	2-Ø10	18

※此型螺帽包含螺絲

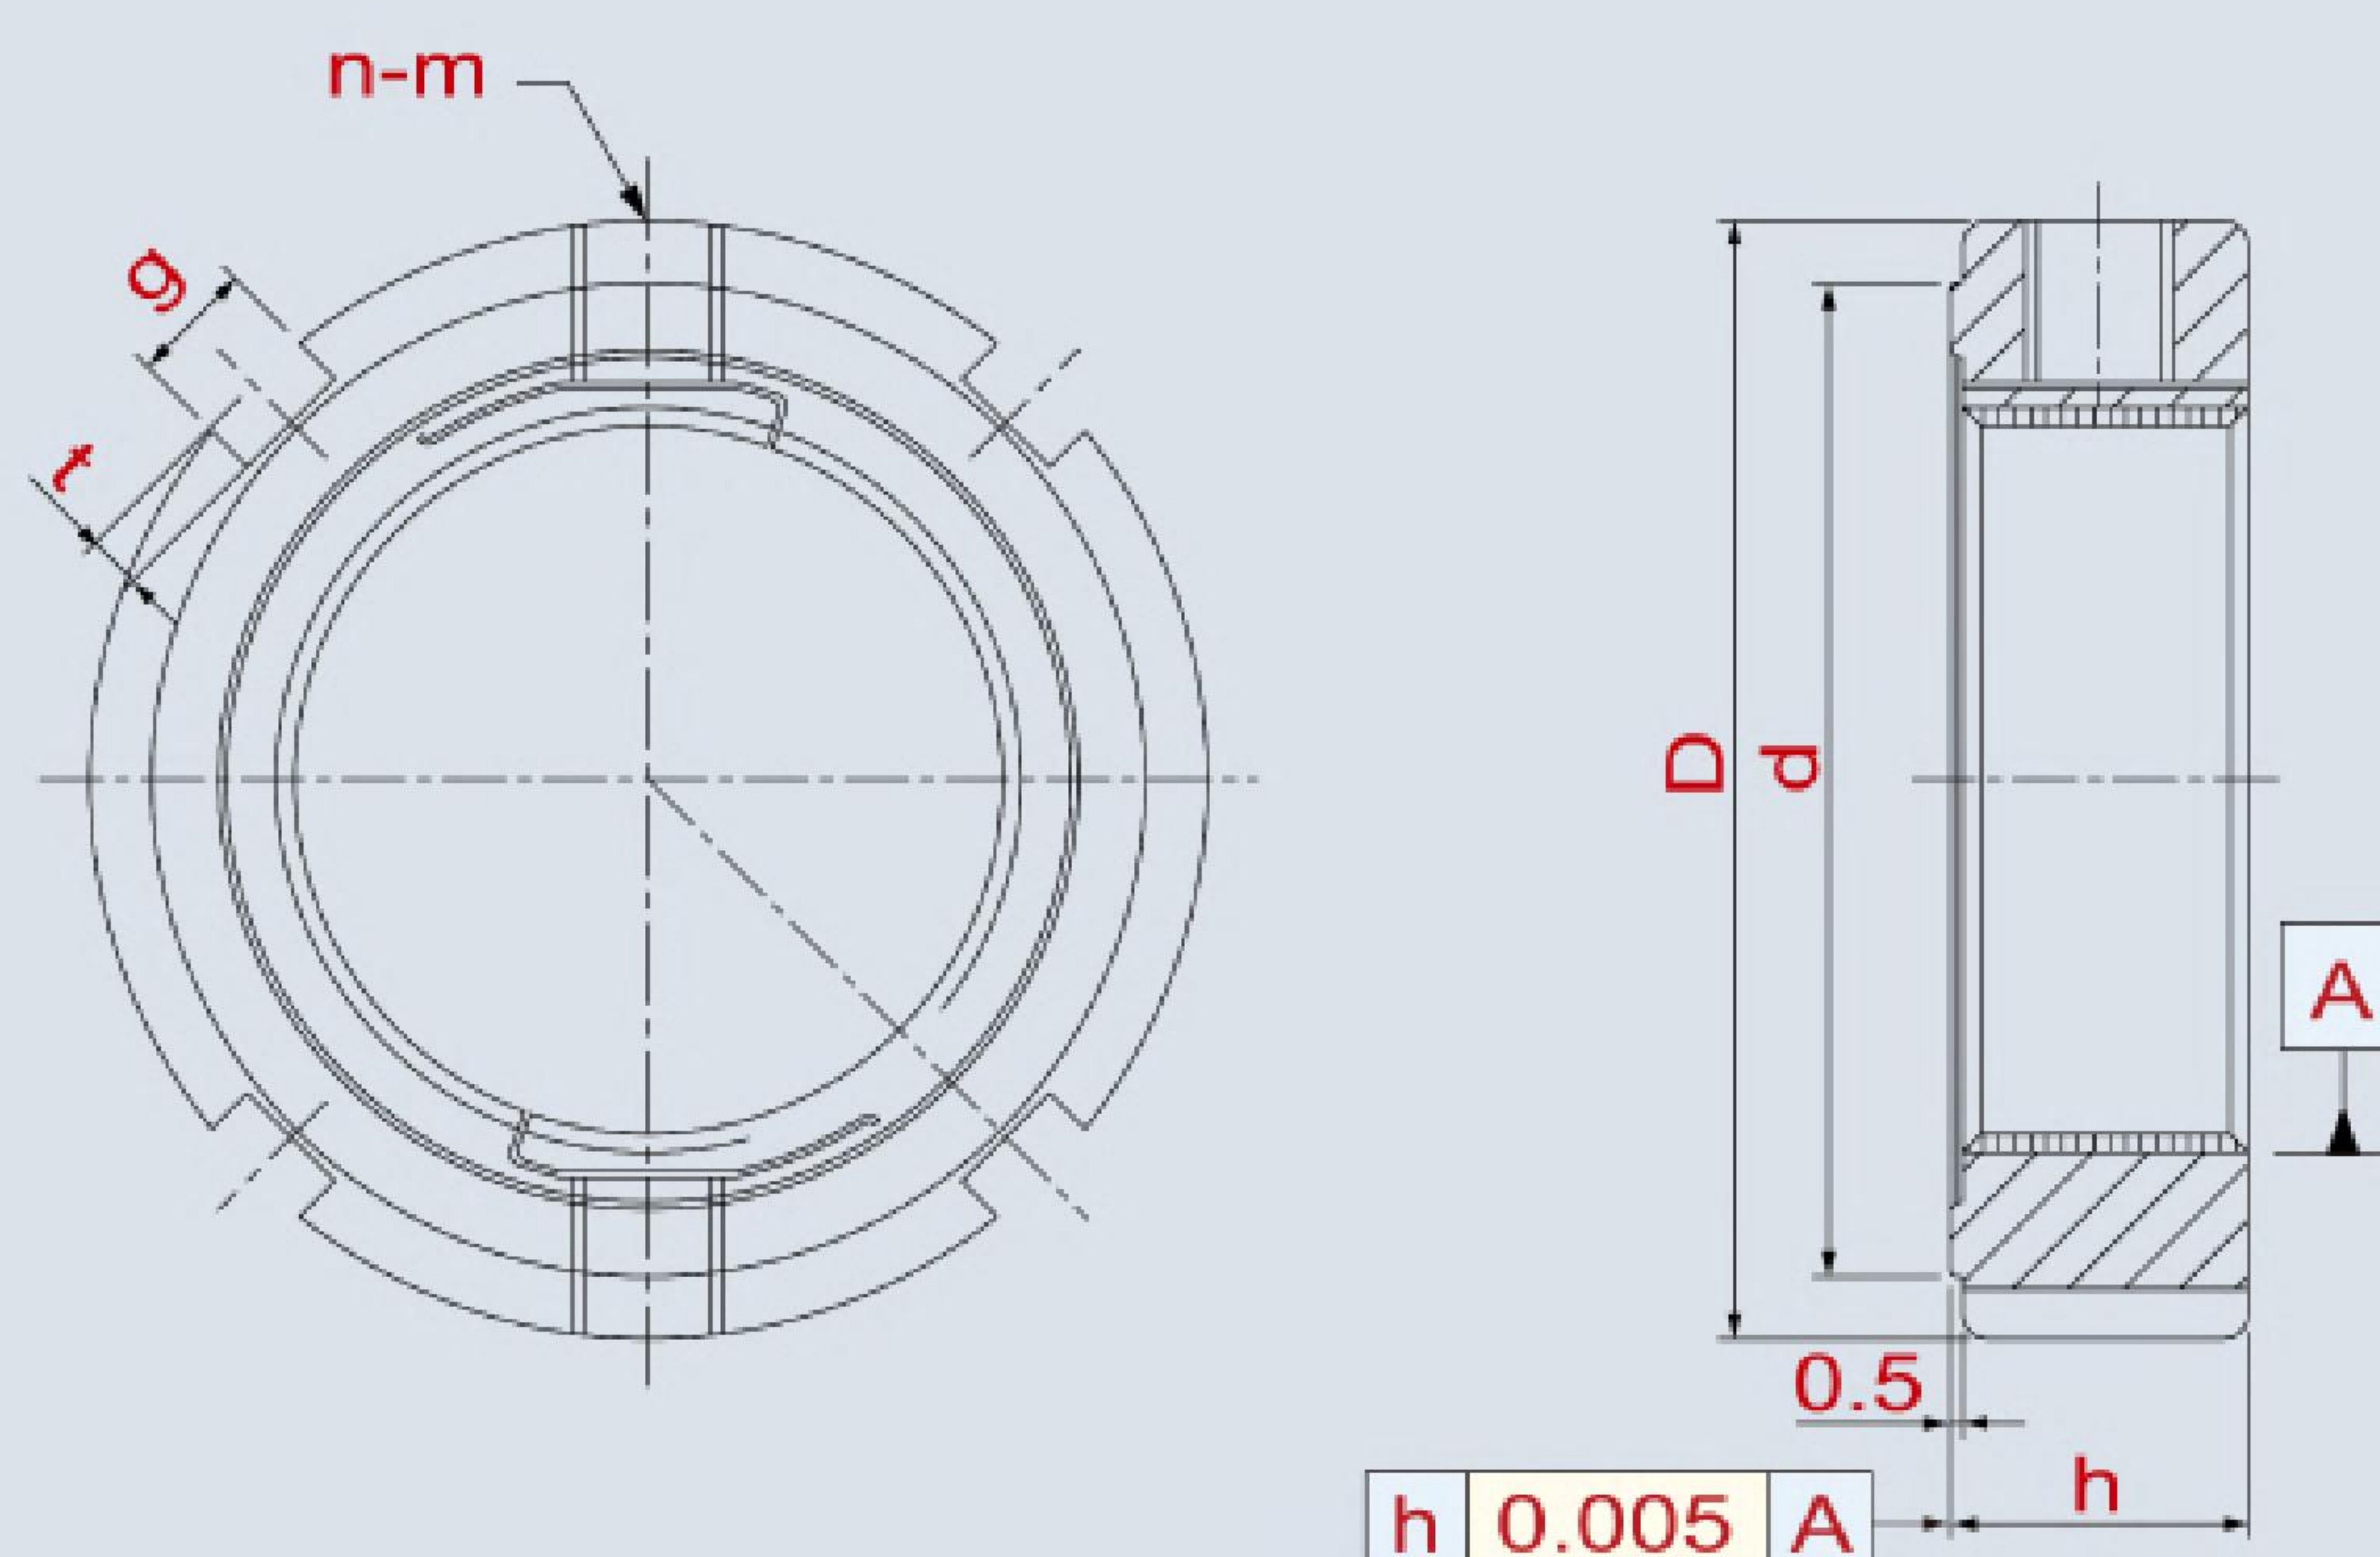

YSLR

Thread	D	h	g	t	d	n-m	MAX. Nm
YSLR-M12 x 1.0P	24	12	4	2	19	2-M6	8
YSLR-M14 x 1.0P	26	12	4	2	21	2-M6	8
YSLR-M15 x 1.0P	30	12	4	2	25	2-M6	8
YSLR-M17 x 1.0P	32	12	4	2	27	2-M6	8
YSLR-M18 x 1.0P	32	12	4	2	27	2-M6	8
YSLR-M20 x 1.0P	35	12	4	2	30	2-M6	8
YSLR-M22 x 1.5P	35	12	4	2	30	2-M6	8
YSLR-M25 x 1.5P	40	12	5	2	35	2-M6	8
YSLR-M30 x 1.5P	45	12	5	2	40	2-M6	8
YSLR-M32 x 1.5P	46	12	5	2	41	2-M6	8
YSLR-M35 x 1.5P	50	12	5	2	45	2-M6	8
YSLR-M38 x 1.5P	52	12	5	2	47	2-M6	8
YSLR-M40 x 1.5P	55	12	6	2.5	49	2-M6	8
YSLR-M42 x 1.5P	56	12	6	2.5	50	2-M6	8
YSLR-M45 x 1.5P	60	12	6	2.5	54	2-M6	8
YSLR-M50 x 1.5P	65	12	6	2.5	59	2-M6	8
YSLR-M52 x 1.5P	67	12	6	2.5	61	2-M6	8
YSLR-M55 x 2.0P	75	15	7	3	68	2-M8	18
YSLR-M60 x 2.0P	80	15	7	3	73	2-M8	18

YSLR locknut uses steel's elasticity characteristics to securely fix the locking nut in the radial direction.

This type of nut is thinner and suited to narrow applications. The design is very simple and easy to lock. This type of nut is not suitable for high precision requirements as it is more difficult to assure the perpendicularity of the nut at this size.



- Material Composition: SCM440(42CrMo4)
- Hardness: HRC28°~32°
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Turning
- Run Out: 0.005mm



YSLR

Thread	D	h	g	t	d	n-m	MAX. Nm
YSLR-M65 x 2.0P	85	15	7	3	78	2-M8	18
YSLR-M70 x 2.0P	90	15	8	3.5	82	2-M8	18
YSLR-M75 x 2.0P	95	15	8	3.5	87	2-M8	18
YSLR-M80 x 2.0P	105	15	8	3.5	97	2-M8	18
YSLR-M85 x 2.0P	110	15	8	3.5	102	2-M8	18
YSLR-M90 x 2.0P	115	15	10	4	106	2-M8	18
YSLR-M95 x 2.0P	120	15	10	4	111	2-M8	18
YSLR-M100 x 2.0P	125	15	10	4	116	2-M8	18
YSLR-M105 x 2.0P	130	20	12	5	119	2-M8	18
YSLR-M110 x 2.0P	135	20	12	5	124	2-M8	18
YSLR-M115 x 2.0P	140	20	12	5	129	2-M8	18
YSLR-M120 x 2.0P	145	20	12	5	134	2-M8	18
YSLR-M125 x 2.0P	150	20	12	5	139	2-M8	18
YSLR-M130 x 2.0P	155	20	12	5	144	2-M8	18
YSLR-M135 x 2.0P	165	20	14	6	152	2-M10	35
YSLR-M140 x 2.0P	170	20	14	6	157	2-M10	35
YSLR-M145 x 2.0P	175	20	14	6	162	2-M10	35
YSLR-M150 x 2.0P	180	20	14	6	167	2-M10	35

※ Screws included with this model.

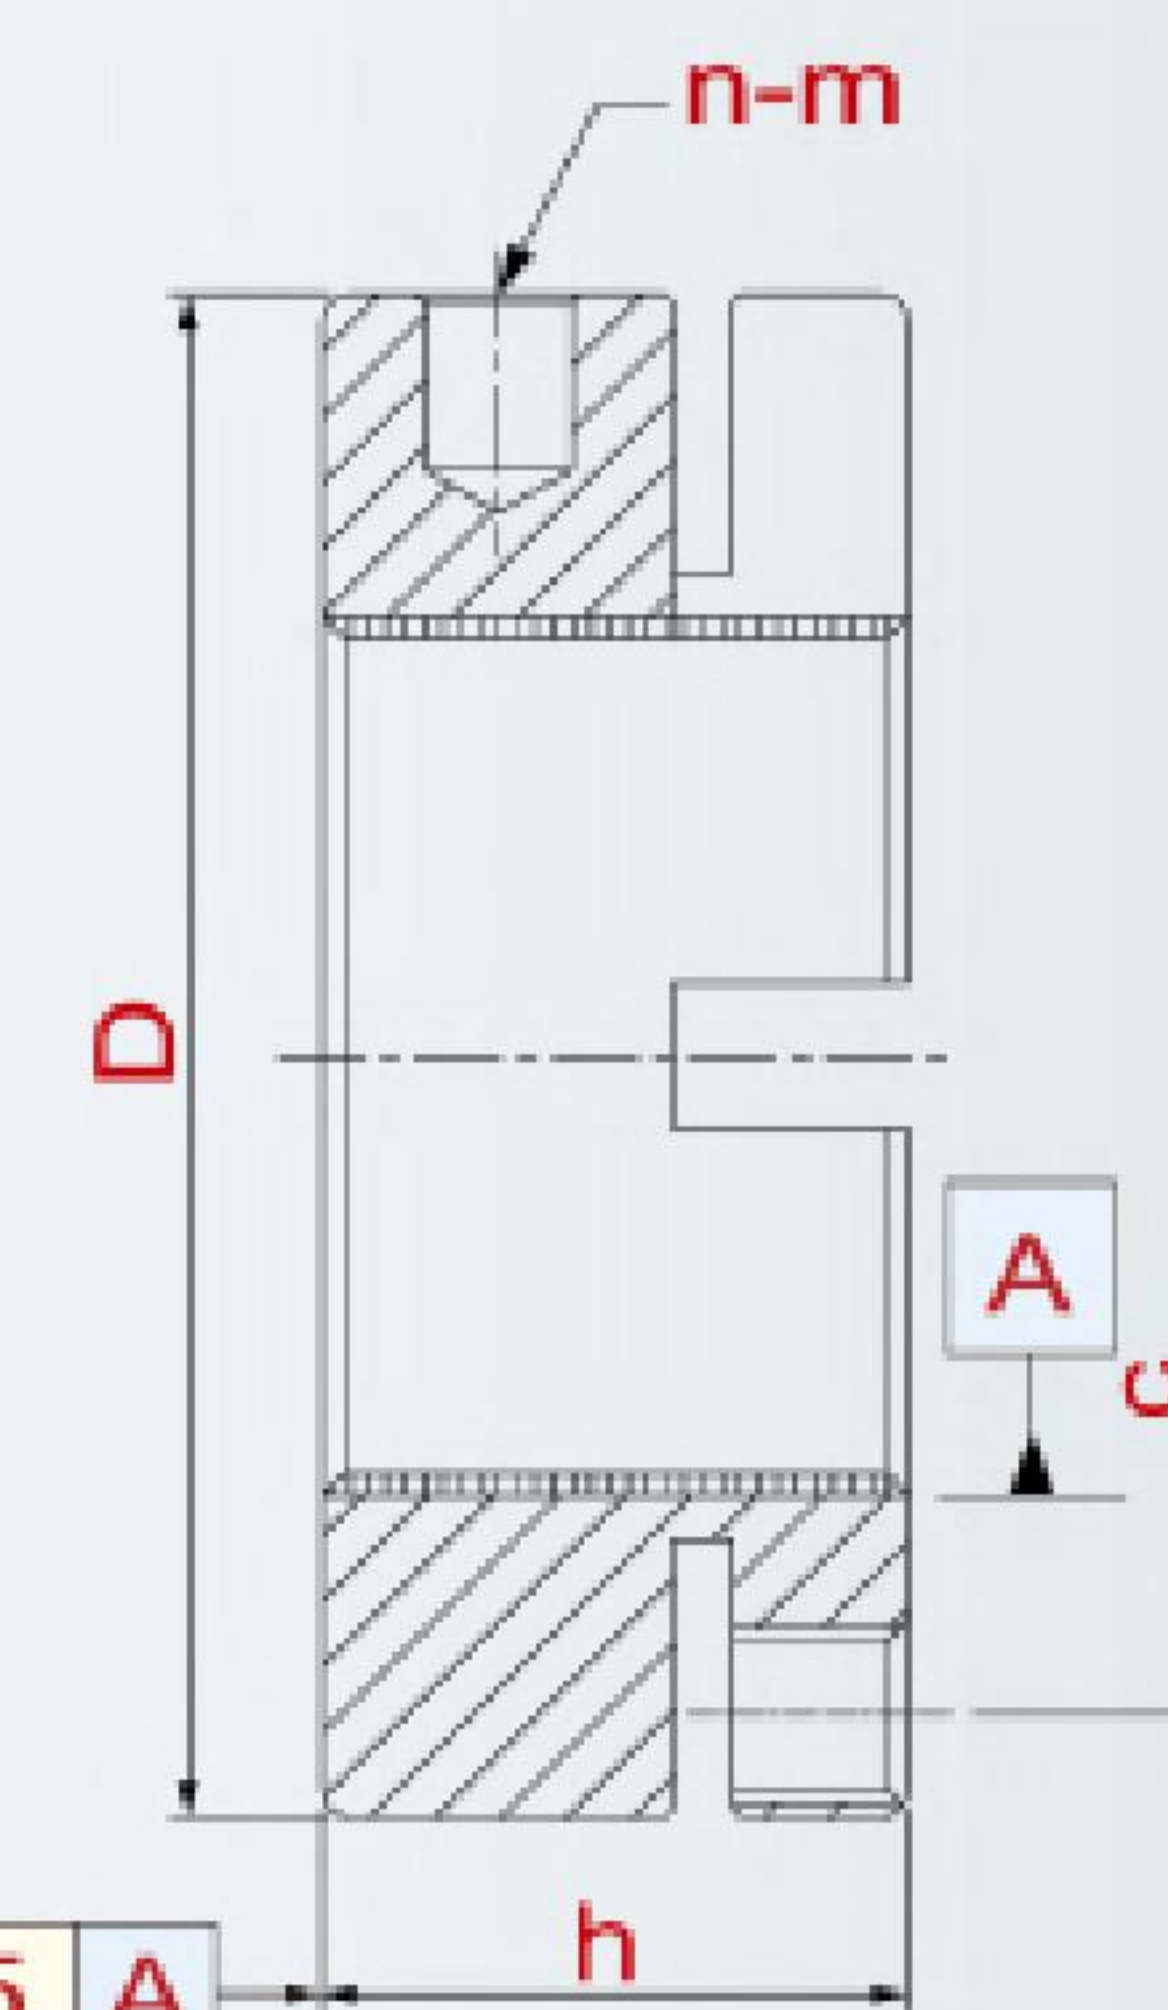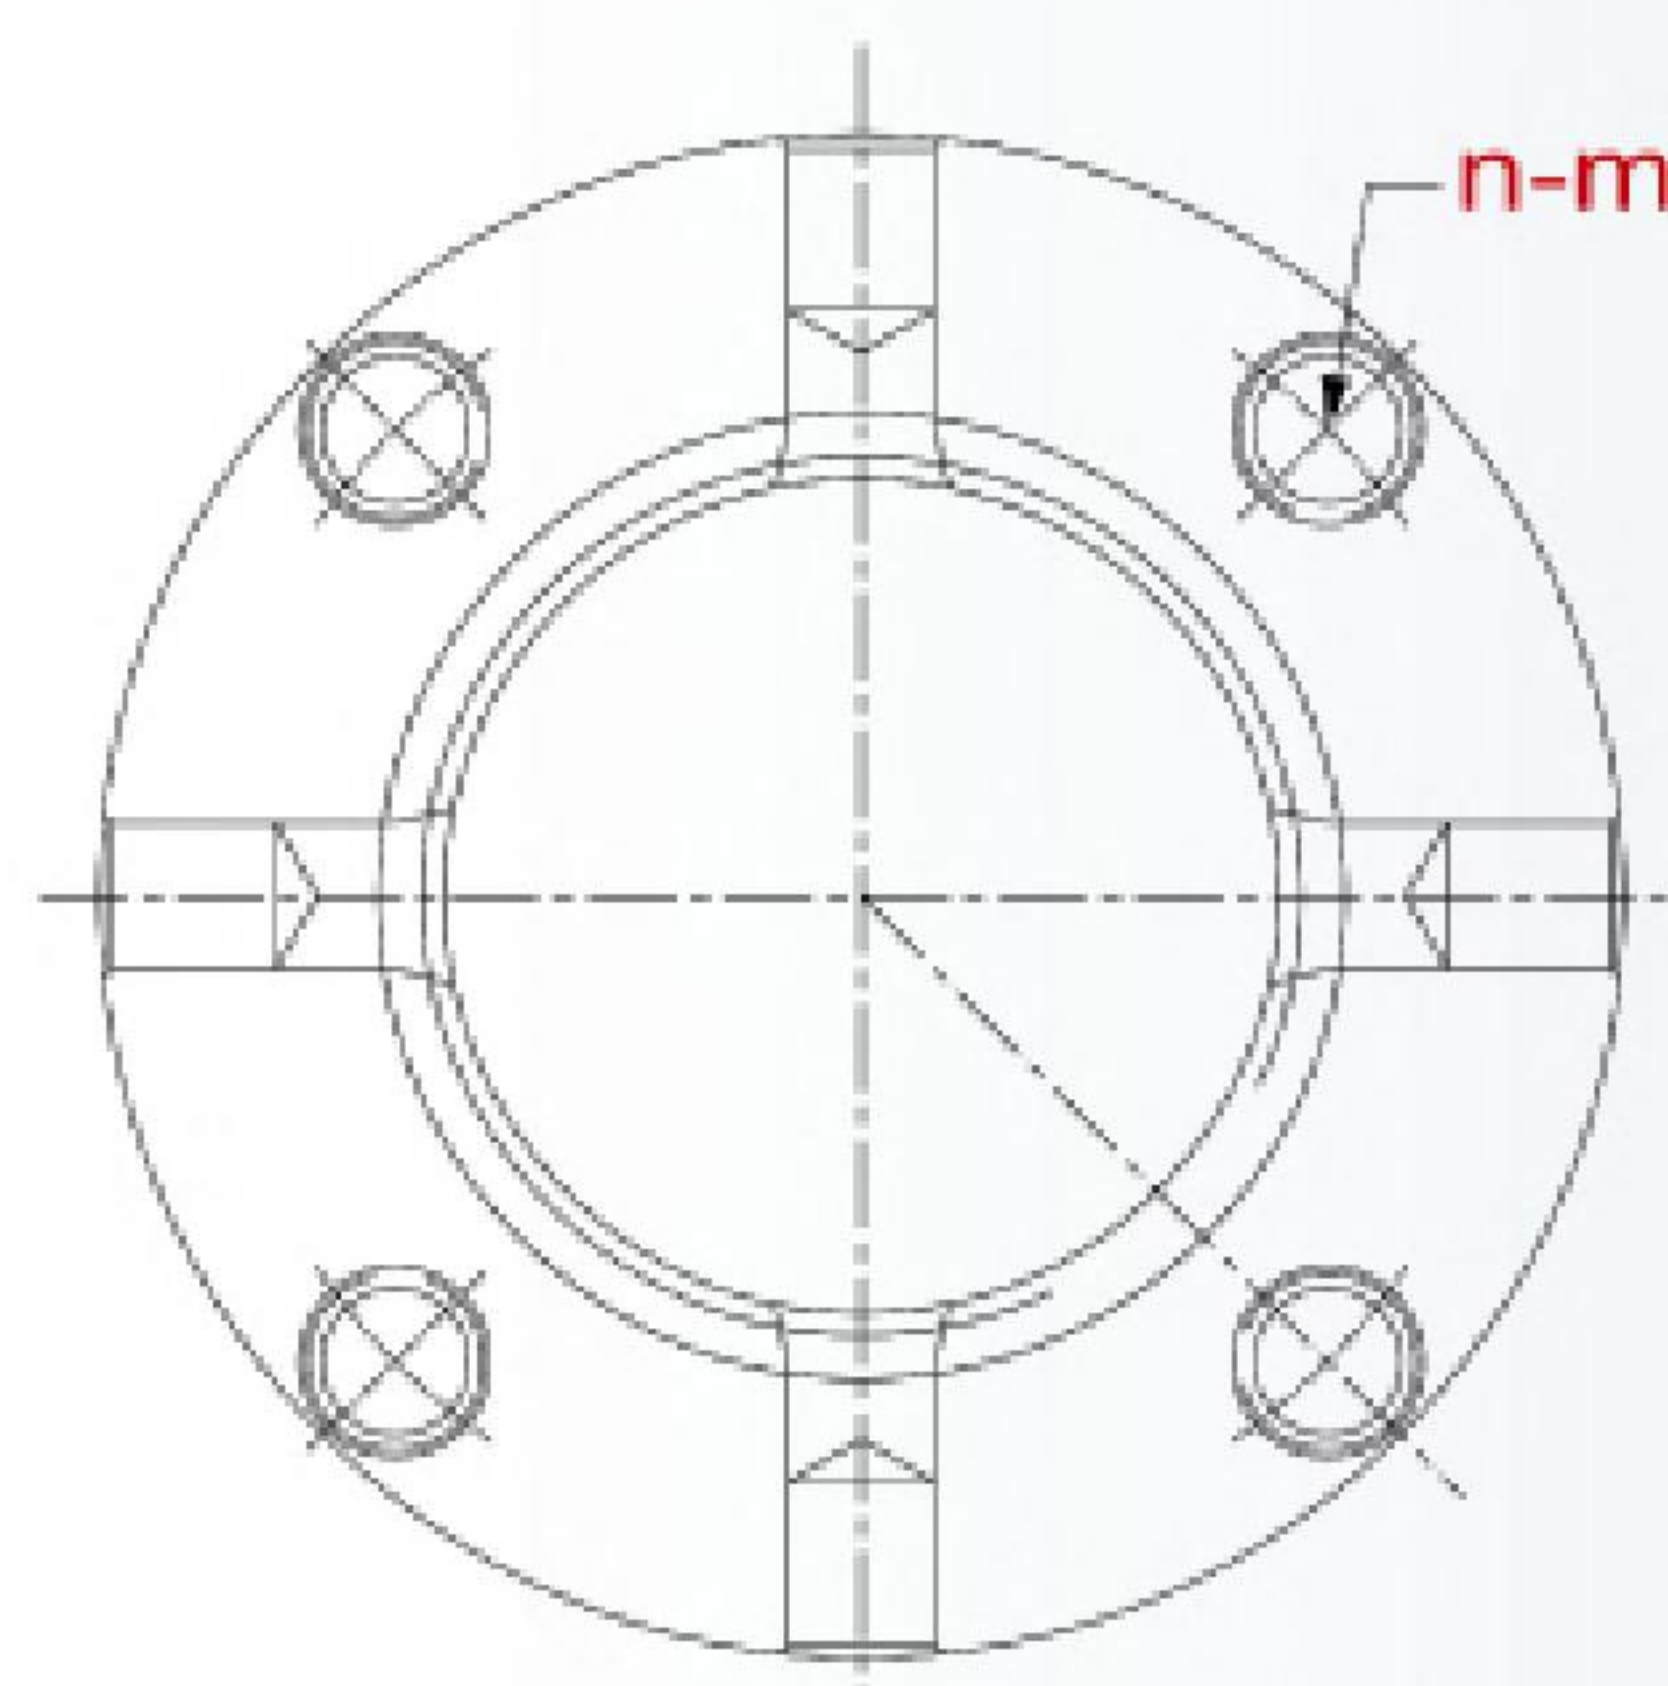


h 0.005 A

YSAM locknut uses steel's elasticity characteristics to securely fix the locking nut in the axial direction.

- Material Composition: SCM440(42CrMo4)
- Hardness: HRC28°~32°
- Thread Accuracy: ISO 4H
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Grinding
- Manufacturing Method: High Precision Turning
- Run Out: 0.002mm
- Run Out: 0.005mm

YSAM

Thread	D	h	n-m	n-Øb	c	MAX. Nm
YSAM-M15 x 1.0P	30	18	4-M5	4-Ø4	24	4.5
YSAM-M17 x 1.0P	32	18	4-M5	4-Ø4	26	4.5
YSAM-M20 x 1.0P	38	18	4-M6	4-Ø4	31	8
YSAM-M25 x 1.5P	45	20	4-M6	4-Ø5	38	8
YSAM-M30 x 1.5P	52	20	4-M6	4-Ø5	45	8
YSAM30/65-M30 x 1.5P	65	30	4-M6	4-Ø6	45	8
YSAM-M35 x 1.5P	65	22	4-M6	4-Ø6	58	8
YSAM35/58-M35 x 1.5P	58	20	4-M6	4-Ø5	51	8
YSAM-M40 x 1.5P	65	22	4-M6	4-Ø6	58	8
YSAM40/85-M40 x 1.5P	85	32	4-M6	4-Ø6	58	8
YSAM-M45 x 1.5P	70	22	6-M6	6-Ø6	63	8
YSAM-M50 x 1.5P	75	25	6-M6	6-Ø6	68	8
YSAM-M55 x 2.0P	85	26	6-M8	6-Ø6	75	18
YSAM-M60 x 2.0P	90	26	6-M8	6-Ø6	80	18
YSAM-M65 x 2.0P	100	26	6-M8	6-Ø8	88	18
YSAM-M70 x 2.0P	100	28	6-M8	6-Ø8	90	18
YSAM-M75 x 2.0P	115	30	6-M10	6-Ø8	102	35
YSAM-M80 x 2.0P	110	30	6-M10	6-Ø8	98	35
YSAM-M85 x 2.0P	115	30	6-M10	6-Ø8	102	35
YSAM-M90 x 2.0P	130	30	6-M10	6-Ø8	118	35
YSAM-M100 x 2.0P	130	30	8-M10	8-Ø8	118	35
YSAM-M110 x 2.0P	140	30	8-M10	8-Ø8	128	35
YSAM-M120 x 2.0P	155	30	8-M10	8-Ø8	142	35
YSAM-M130 x 2.0P	165	30	8-M10	8-Ø8	152	35

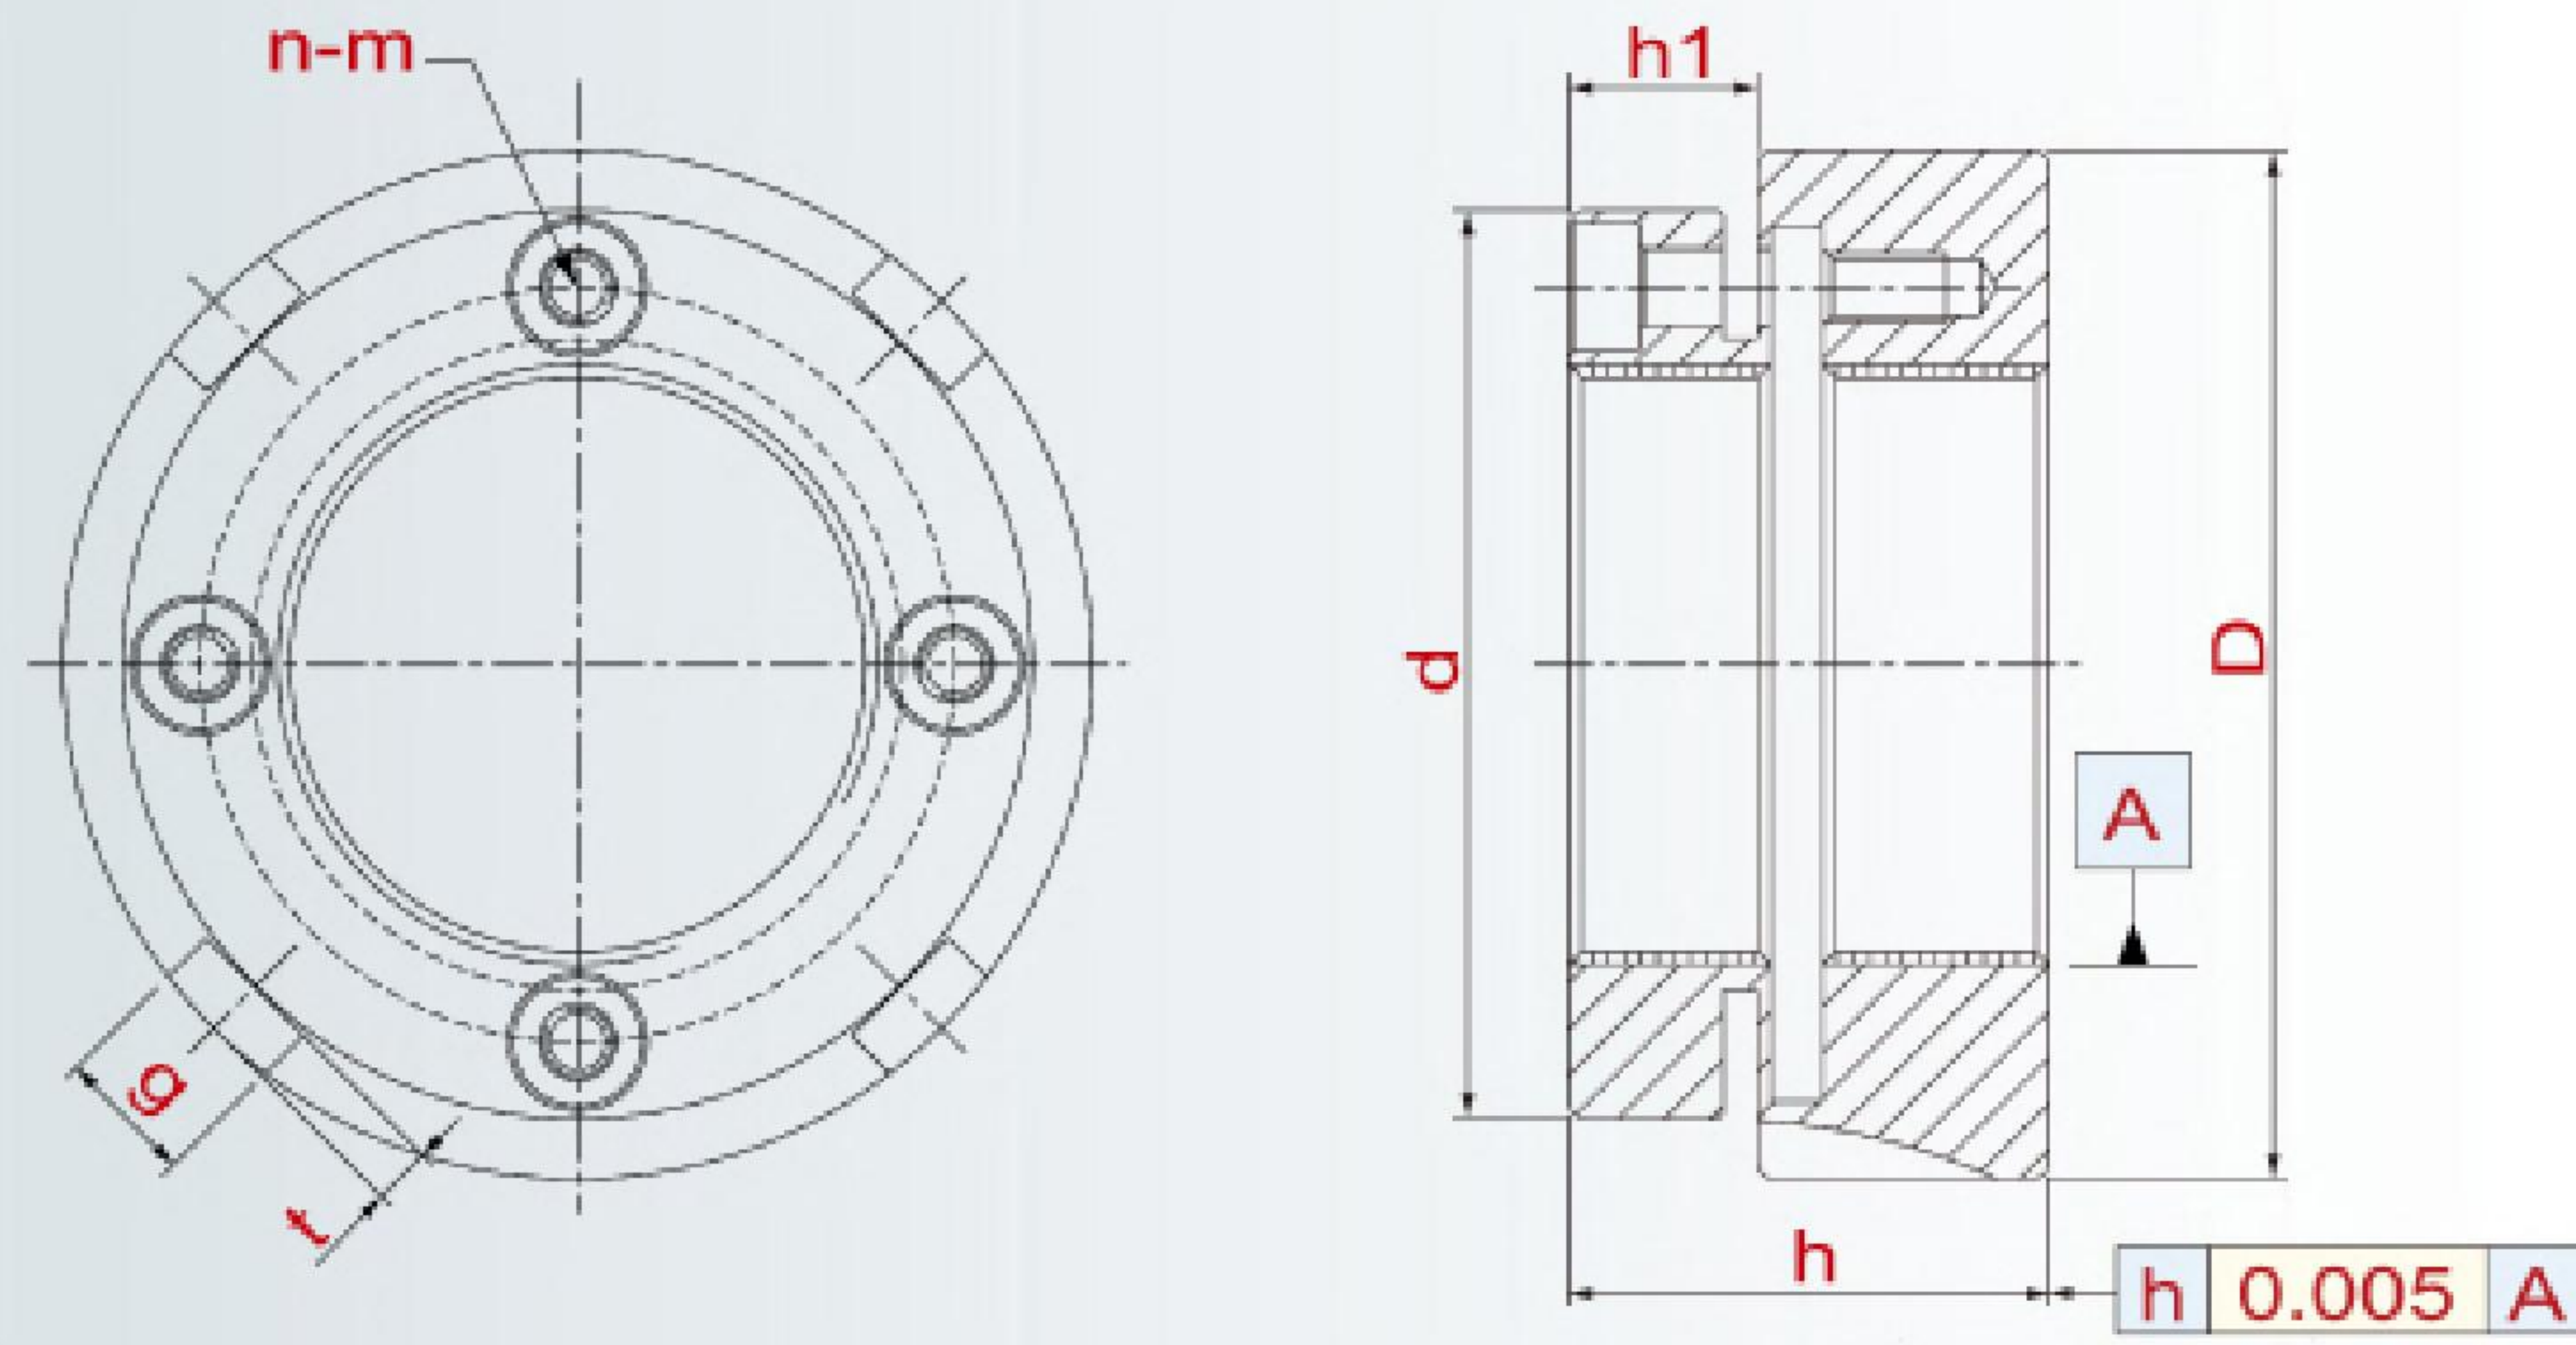

※ Screws included with this model.


YSMSW locknut uses steel's elasticity characteristics to securely fix the locking nut in the axial direction. This type of nut is thicker and the outer diameter is larger, making this nut suitable for heavier axial loads.

- Material Composition: SCM440(42CrMo4)
- Hardness: HRC28°~32°
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Turning
- Run Out: 0.005mm



YSMSW

Thread	D	h	h1	g	t	d	n-m	MAX. Nm
YSMSW 20/28-M20 x 1.5P	42	28	11	6	2.5	38	4-M4	3.5
YSMSW 20/40-M20 x 1.5P	52	40	11	7	3	42	4-M4	3.5
YSMSW 25/28-M25 x 1.5P	47	28	11	7	3	43	4-M4	3.5
YSMSW 25/40-M25 x 1.5P	62	40	11	8	3.5	47	4-M4	3.5
YSMSW 30/28-M30 x 1.5P	52	28	11	7	3	48	4-M4	3.5
YSMSW 30/44-M30 x 1.5P	68	44	11	8	3.5	52	4-M4	3.5
YSMSW 35/28-M35 x 1.5P	60	28	11	8	3.5	53	4-M4	3.5
YSMSW 35/44-M35 x 1.5P	73	44	11	8	3.5	60	4-M4	3.5
YSMSW 40/28-M40 x 1.5P	65	28	11	8	3.5	58	6-M4	3.5
YSMSW 40/44-M40 x 1.5P	75	44	11	8	3.5	62	6-M4	3.5
YSMSW 45/28-M45 x 1.5P	70	28	11	8	3.5	63	6-M4	3.5
YSMSW 45/44-M45 x 1.5P	90	44	11	10	4	70	6-M4	3.5
YSMSW 50/32-M50 x 1.5P	75	32	11	8	3.5	68	6-M4	3.5
YSMSW 50/46-M50 x 1.5P	95	46	11	10	4	75	6-M4	3.5
YSMSW 55/46-M55 x 1.5P	100	46	12	10	4	80	6-M5	4.5
YSMSW 60/46-M60 x 1.5P	100	46	12	10	4	85	6-M5	4.5
YSMSW 65/46-M65 x 1.5P	110	46	12	10	4	90	6-M5	4.5
YSMSW 70/46-M70 x 1.5P	115	46	12	10	4	95	6-M5	4.5

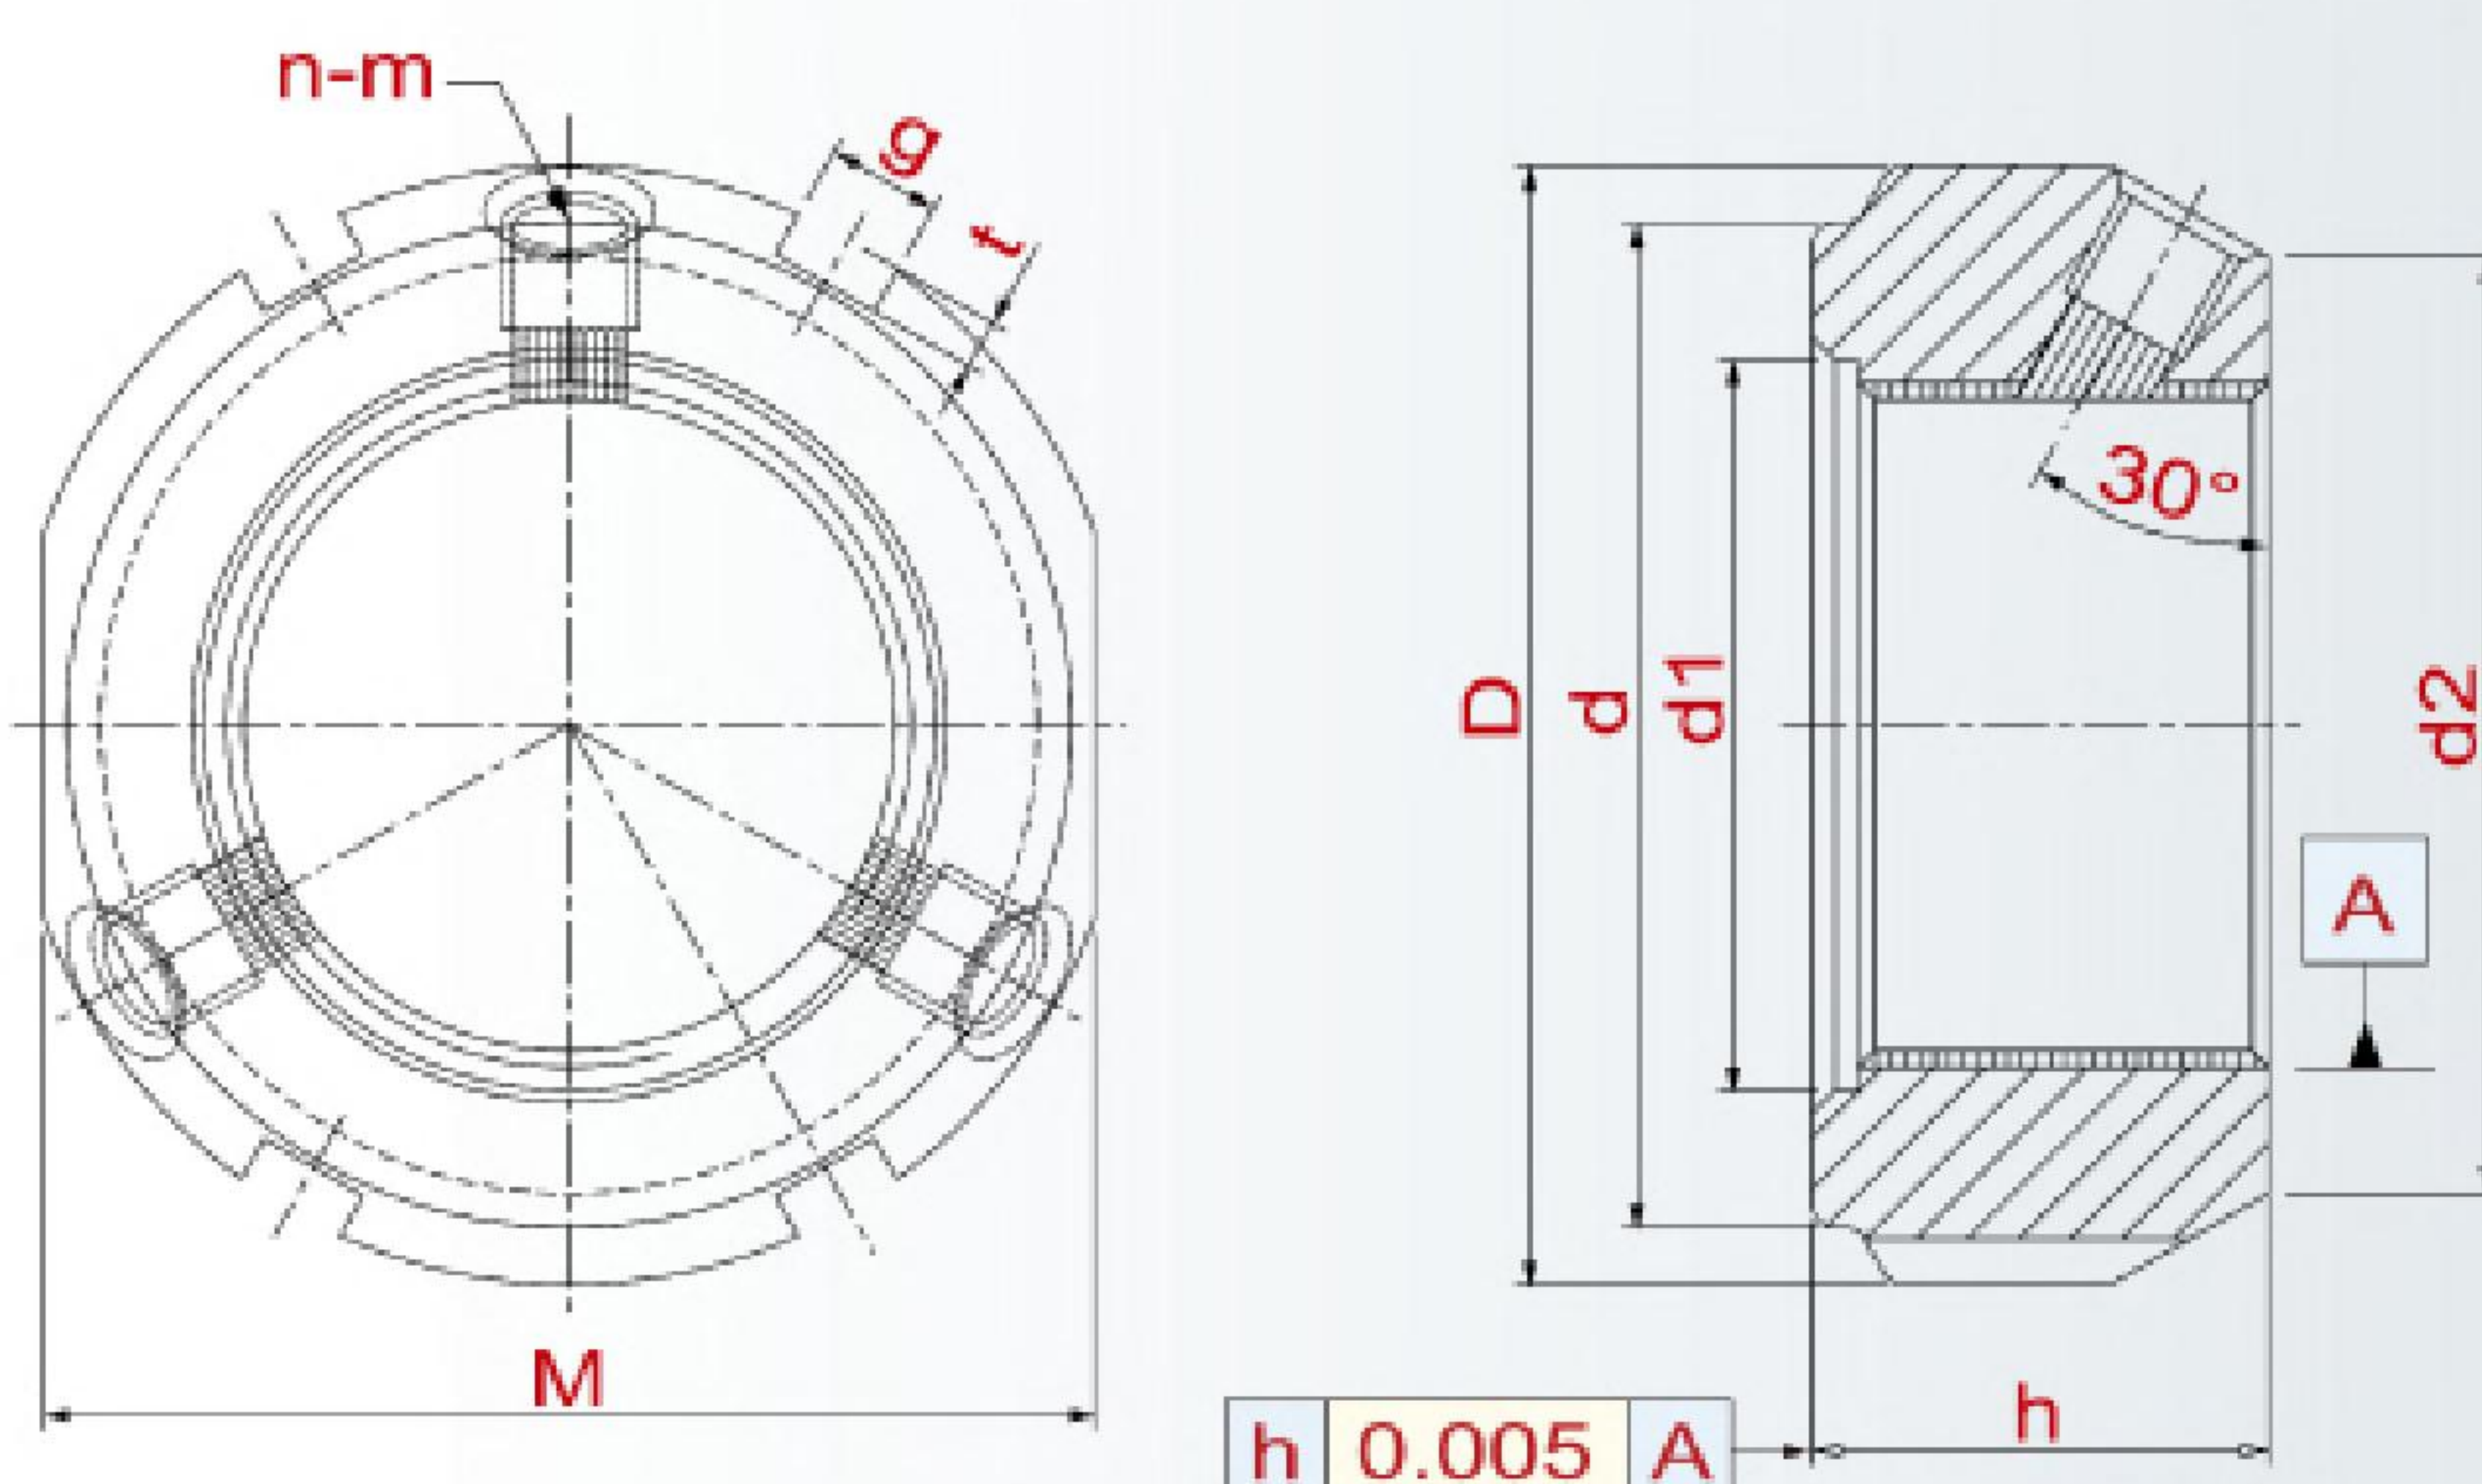


YSFT Locks the threads from 30° angle direction with three point locks. The advantages of this design is the brass locking threads can fully contact with male threads, thus ensuring the assembled accuracy.

- Material Composition: SCM440(42CrMo4)
- Hardness: HRC28~32°
- Thread Accuracy: ISO 4H
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Grinding
- Manufacturing Method: High Precision Turning
- Run Out: 0.002mm
- Run Out: 0.005mm

YSFT

Thread	D	h	g	t	d	d1	d2	M	n-m	MAX. Nm
YSFT-M10 x 0.75P	28	14	4	2	23	11	21	24	3 - M5	4.5
YSFT-M12 x 1.0P	30	14	4	2	25	13	23	27	3 - M5	4.5
YSFT-M15 x 1.0P	33	16	4	2	28	16	26	30	3 - M5	4.5
YSFT-M17 x 1.0P	37	18	5	2	33	18	29	34	3 - M6	8
YSFT-M20 x 1.0P	40	18	5	2	35	21	32	36	3 - M6	8
YSFT-M25 x 1.5P	44	20	5	2	39	26	36	41	3 - M6	8
YSFT-M30 x 1.5P	49	20	5	2	44	32	41	46	3 - M6	8
YSFT-M35 x 1.5P	54	22	5	2	49	38	46	50	3 - M6	8
YSFT-M40 x 1.5P	65	22	6	2.5	59	42	56	60	3 - M6	8
YSFT-M45 x 1.5P	70	22	6	2.5	64	48	61	65	3 - M6	8
YSFT-M50 x 1.5P	75	25	7	3	68	52	65	70	3 - M6	8
YSFT-M55 x 2.0P	85	25	7	3	78	58	74	80	3 - M8	18
YSFT-M60 x 2.0P	90	26	8	3.5	82	62	78	85	3 - M8	18
YSFT-M65 x 2.0P	95	28	8	3.5	87	68	83	90	3 - M8	18
YSFT-M70 x 2.0P	100	28	8	3.5	92	72	88	95	3 - M8	18
YSFT-M75 x 2.0P	105	28	8	3.5	97	77	93	100	3 - M8	18
YSFT-M80 x 2.0P	110	32	8	3.5	100	83	98	-	3 - M8	18
YSFT-M85 x 2.0P	120	32	10	4	110	88	107	-	3 - M10	35
YSFT-M90 x 2.0P	125	32	10	4	115	93	112	-	3 - M10	35
YSFT-M95 x 2.0P	130	32	10	4	120	98	117	-	3 - M10	35
YSFT-M100 x 2.0P	135	32	10	4	125	103	122	-	3 - M10	35
YSFT-M110 x 2.0P	145	32	10	4	134	112	132	-	3 - M10	35
YSFT-M120 x 2.0P	155	32	10	4	144	122	142	-	3 - M10	35
YSFT-M130 x 2.0P	165	32	12	5	154	132	152	-	3 - M10	35
YSFT-M140 x 2.0P	175	32	14	6	164	142	162	-	3 - M10	35
YSFT-M150 x 2.0P	185	32	14	6	174	152	172	-	3 - M10	35
YSFT-M160 x 3.0P	195	32	14	6	184	162	182	-	3 - M10	35
YSFT-M170 x 3.0P	205	32	14	6	194	172	192	-	3 - M10	35
YSFT-M180 x 3.0P	215	32	16	7	204	182	202	-	3 - M10	35
YSFT-M190 x 3.0P	225	32	16	7	214	192	212	-	3 - M10	35
YSFT-M200 x 3.0P	235	32	18	8	224	202	222	-	3 - M10	35

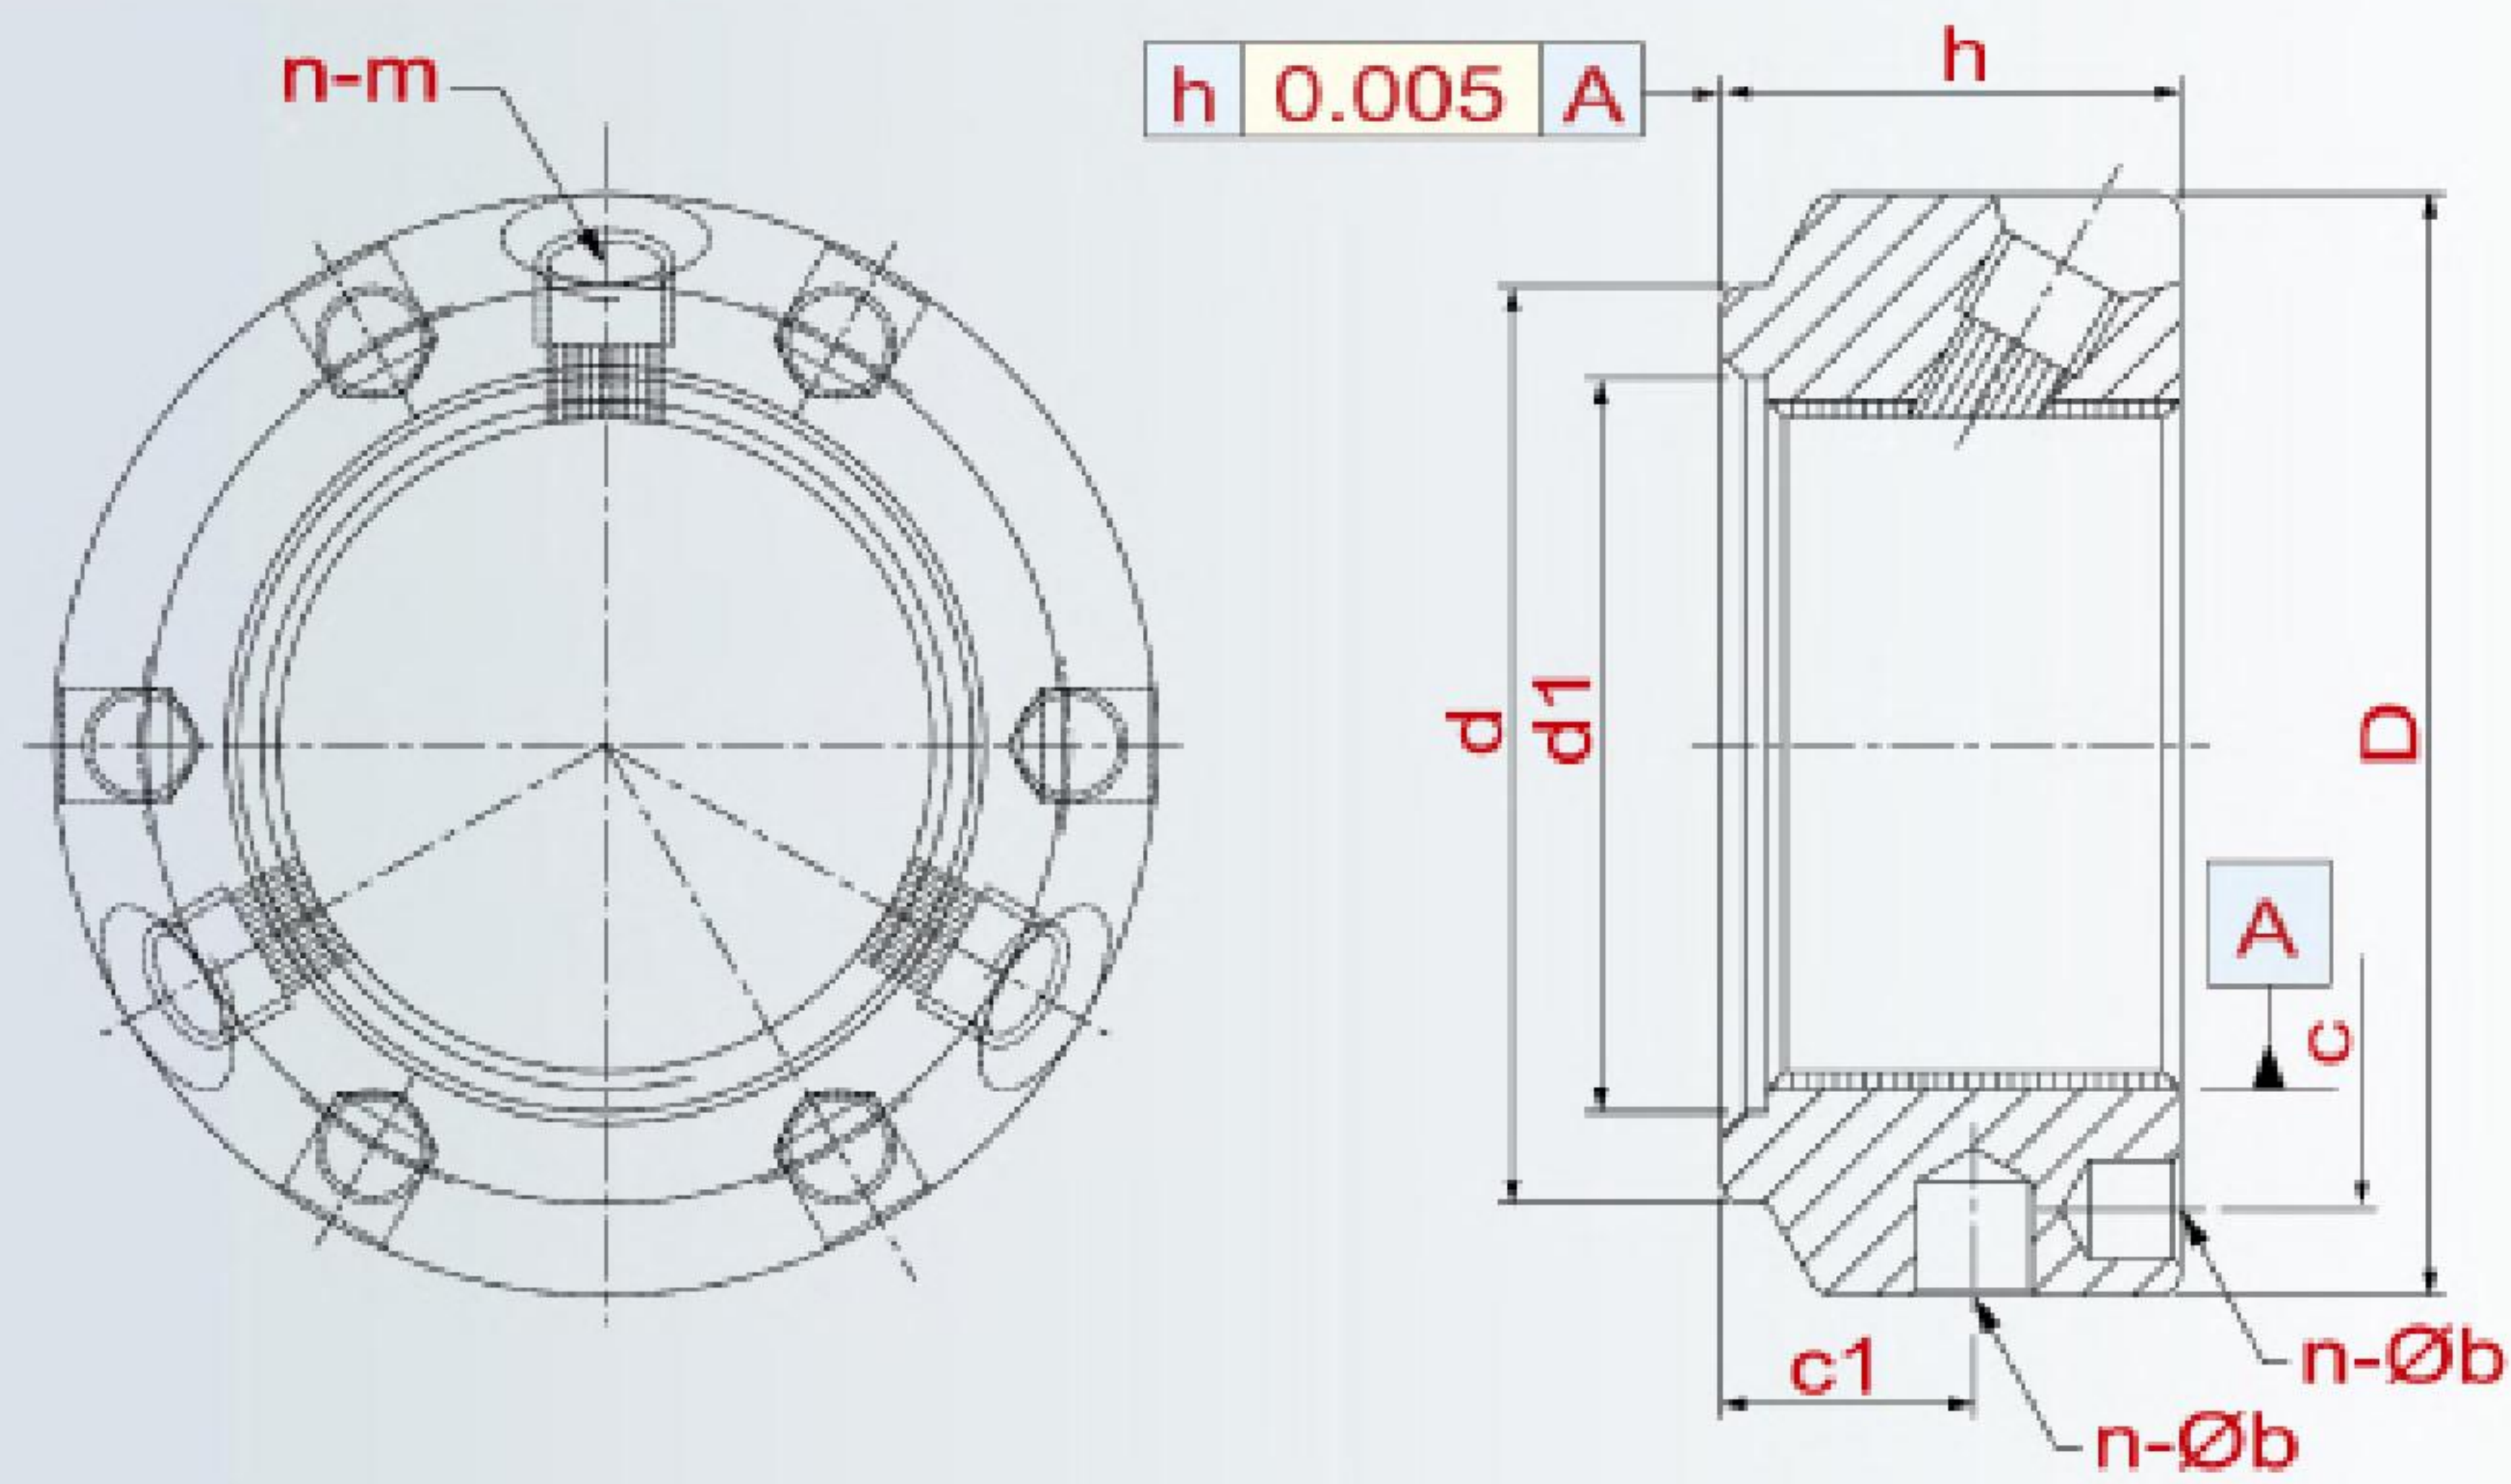

YSFTA Uses the same locking method as YSFT locknut, but this nut has wrench holes on the radius side and back surface side, making it easy for different assembly environment requirements.

- Material Composition: SCM440(42CrMo4)
- Hardness: HRC28°~32°
- Thread Accuracy: ISO 4H
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Grinding
- Manufacturing Method: High Precision Turning
- Run Out: 0.002mm
- Run Out: 0.005mm




YSFTA

Thread	D	h	d	d1	c	c1	n-Øb	n-Øb1	n-m	MAX. Nm
YSFTA-M25 x 1.5P	42	20	35	26	32.5	11	6-Ø4.3	6-Ø4	3-M6	8
YSFTA-M30 x 1.5P	48	20	40	32	40.5	11	6-Ø4.3	6-Ø5	3-M6	8
YSFTA-M35 x 1.5P	53	20	47	38	45.5	11	6-Ø4.3	6-Ø5	3-M6	8
YSFTA-M40 x 1.5P	58	22	52	42	50.5	12	6-Ø4.3	6-Ø5	3-M6	8
YSFTA-M45 x 1.5P	68	22	58	48	58	12	6-Ø4.3	6-Ø6	3-M6	8
YSFTA-M50 x 1.5P	70	24	63	52	61.5	13	6-Ø4.3	6-Ø6	3-M6	8
YSFTA-M55 x 1.5P	75	24	70	58	66.5	13	6-Ø4.3	6-Ø6	3-M6	8
YSFTA-M60 x 1.5P	84	24	75	62	74.5	13	6-Ø5.3	6-Ø6	3-M8	18
YSFTA-M65 x 1.5P	88	25	80	68	78.5	13	6-Ø5.3	6-Ø6	3-M8	18
YSFTA-M70 x 1.5P	95	26	86	72	85	14	6-Ø5.3	6-Ø8	3-M8	18
YSFTA-M75 x 1.5P	100	26	91	77	88	13	6-Ø6.4	6-Ø8	3-M8	18
YSFTA-M80 x 2.0P	110	30	97	83	95	16	6-Ø6.4	6-Ø8	3-M8	18
YSFTA-M85 x 2.0P	115	32	102	88	100	17	6-Ø6.4	6-Ø8	3-M10	35
YSFTA-M90 x 2.0P	120	32	110	93	108	17	6-Ø6.4	6-Ø8	3-M10	35
YSFTA-M95 x 2.0P	125	32	114	98	113	17	6-Ø6.4	6-Ø8	3-M10	35
YSFTA-M100 x 2.0P	130	32	120	103	118	17	6-Ø6.4	6-Ø8	3-M10	35
YSFTA-M110 x 2.0P	140	32	132	112	128	17	6-Ø6.4	6-Ø8	3-M10	35
YSFTA-M120 x 2.0P	155	32	142	122	140	17	6-Ø6.4	6-Ø8	3-M10	35
YSFTA-M130 x 3.0P	165	32	156	132	153	17	6-Ø6.4	6-Ø8	3-M10	35
YSFTA-M140 x 3.0P	180	32	166	142	165	17	6-Ø6.4	6-Ø10	3-M10	35
YSFTA-M150 x 3.0P	190	32	180	152	175	17	6-Ø6.4	6-Ø10	3-M10	35
YSFTA-M160 x 3.0P	205	32	190	162	185	17	6-Ø8.4	6-Ø10	3-M10	35
YSFTA-M170 x 3.0P	215	32	205	172	195	17	6-Ø8.4	6-Ø10	3-M10	35
YSFTA-M180 x 3.0P	230	32	215	182	210	17	6-Ø8.4	6-Ø10	3-M10	35
YSFTA-M190 x 3.0P	240	32	225	192	224	17	6-Ø8.4	6-Ø10	3-M10	35
YSFTA-M200 x 3.0P	245	32	237	202	229	17	6-Ø8.4	6-Ø10	3-M10	35



Precision Locknuts for Ballscrews, High Precision Spindles, Mechanical Transmitting Locking.

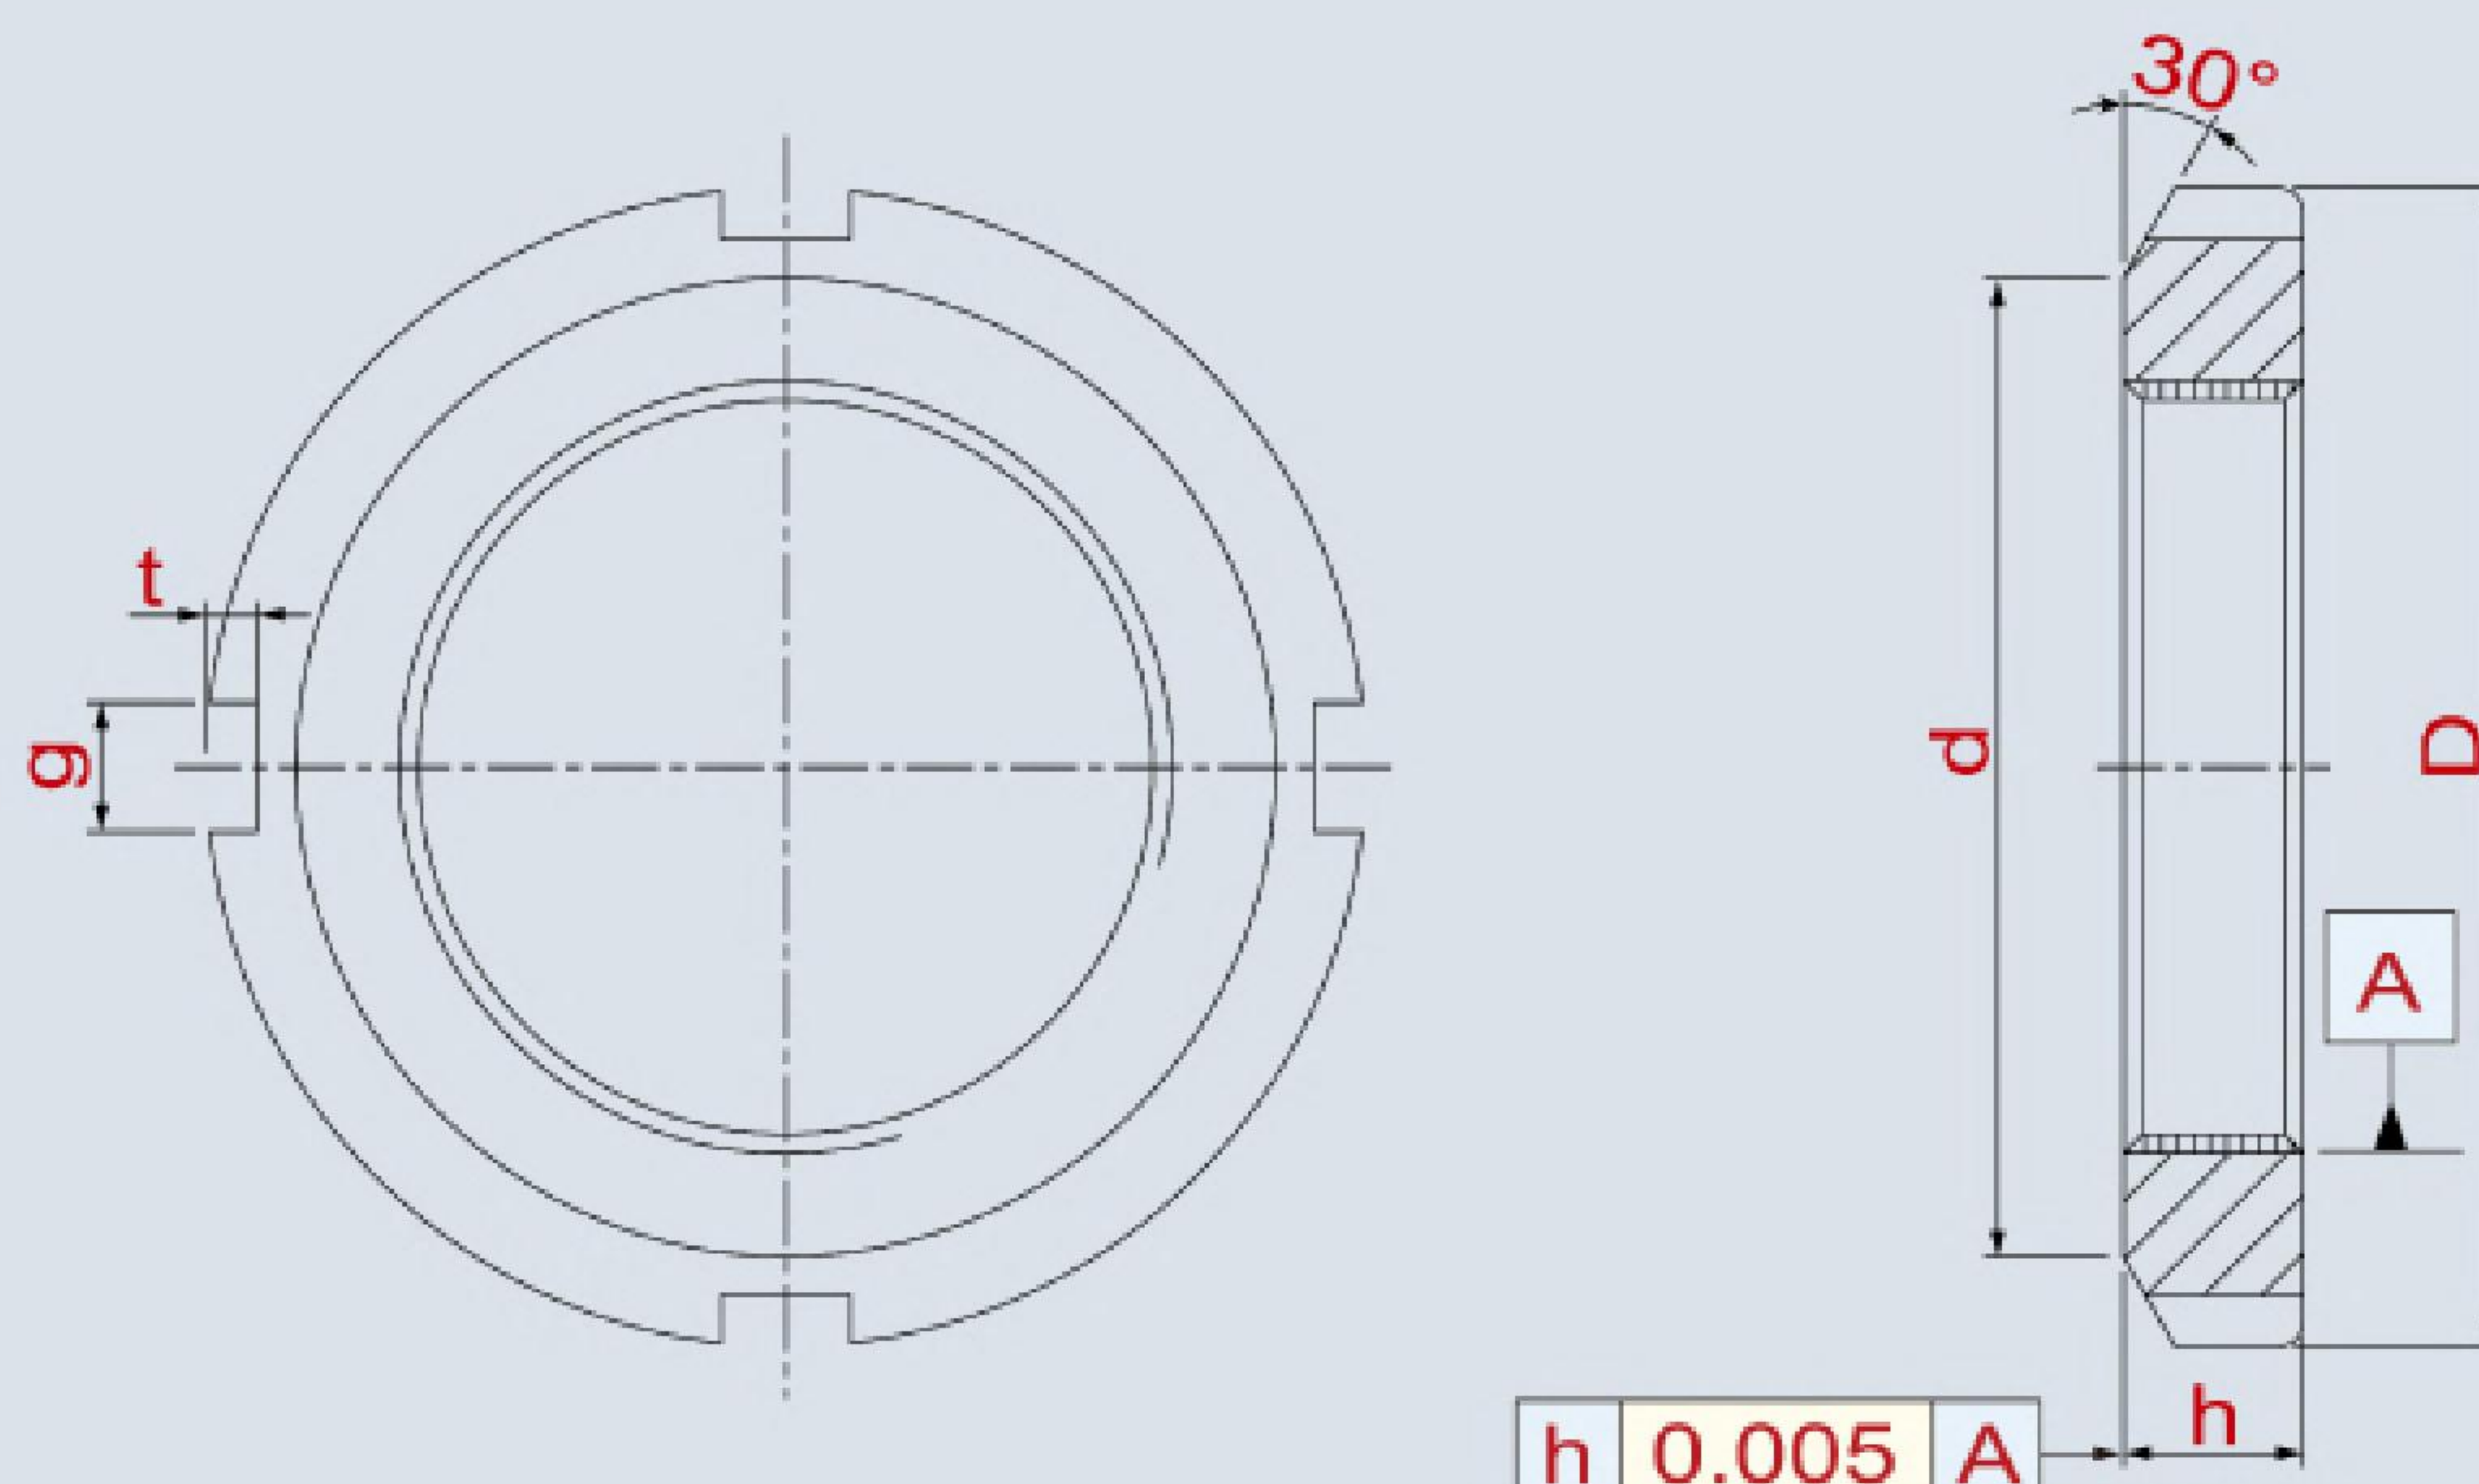

AN

Thread	D	h	g	t	d
AN 0-M10 x 0.75P	18	4	3	2	13.5
AN 1-M12 x 1.0P	22	4	3	2	17
AN 2-M15 x 1.0P	25	5	4	2	21
AN 3-M17 x 1.0P	28	5	4	2	24
AN 4-M20 x 1.0P	32	6	4	2	26
AN 5-M25 x 1.5P	38	7	5	2	32
AN 6-M30 x 1.5P	45	7	5	2	38
AN 7-M35 x 1.5P	52	8	5	2	44
AN 8-M40 x 1.5P	58	9	6	2.5	50
AN 9-M45 x 1.5P	65	10	6	2.5	56
AN 10-M50 x 1.5P	70	11	6	2.5	61
AN 11-M55 x 2.0P	75	11	7	3	67
AN 12-M60 x 2.0P	80	11	7	3	73
AN 13-M65 x 2.0P	85	12	7	3	79
AN 14-M70 x 2.0P	92	12	8	3.5	85
AN 15-M75 x 2.0P	98	13	8	3.5	90
AN 16-M80 x 2.0P	105	15	8	3.5	95
AN 17-M85 x 2.0P	110	16	8	3.5	102
AN 18-M90 x 2.0P	120	16	10	4	108

Simple structure AN locknut, simultaneously machined threading and end face, assuring minimum deviation error.

- Material Composition: S45C(C45E4)
- Hardness: HRC26°~28°
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Turning
- Run Out: 0.005mm




AN

Thread	D	h	g	t	d
AN 19-M95 x 2.0P	125	17	10	4	113
AN 20-M100 x 2.0P	130	18	10	4	120
AN 21-M105 x 2.0P	140	18	12	5	126
AN 22-M110 x 2.0P	145	19	12	5	133
AN 23-M115 x 2.0P	150	19	12	5	137
AN 24-M120 x 2.0P	155	20	12	5	138
AN 25-M125 x 2.0P	160	21	12	5	148
AN 26-M130 x 2.0P	165	21	12	5	149
AN 27-M135 x 2.0P	175	22	14	6	160
AN 28-M140 x 2.0P	180	22	14	6	160
AN 29-M145 x 2.0P	190	24	14	6	172
AN 30-M150 x 2.0P	195	24	14	6	171
AN 31-M155 x 2.0P	200	25	16	7	182
AN 32-M160 x 3.0P	210	25	16	7	182
AN 33-M165 x 3.0P	210	26	16	7	193
AN 34-M170 x 3.0P	220	26	16	7	193
AN 36-M180 x 3.0P	230	27	18	8	203
AN 38-M190 x 3.0P	240	28	18	8	214
AN 40-M200 x 3.0P	250	29	18	8	226



YSRN

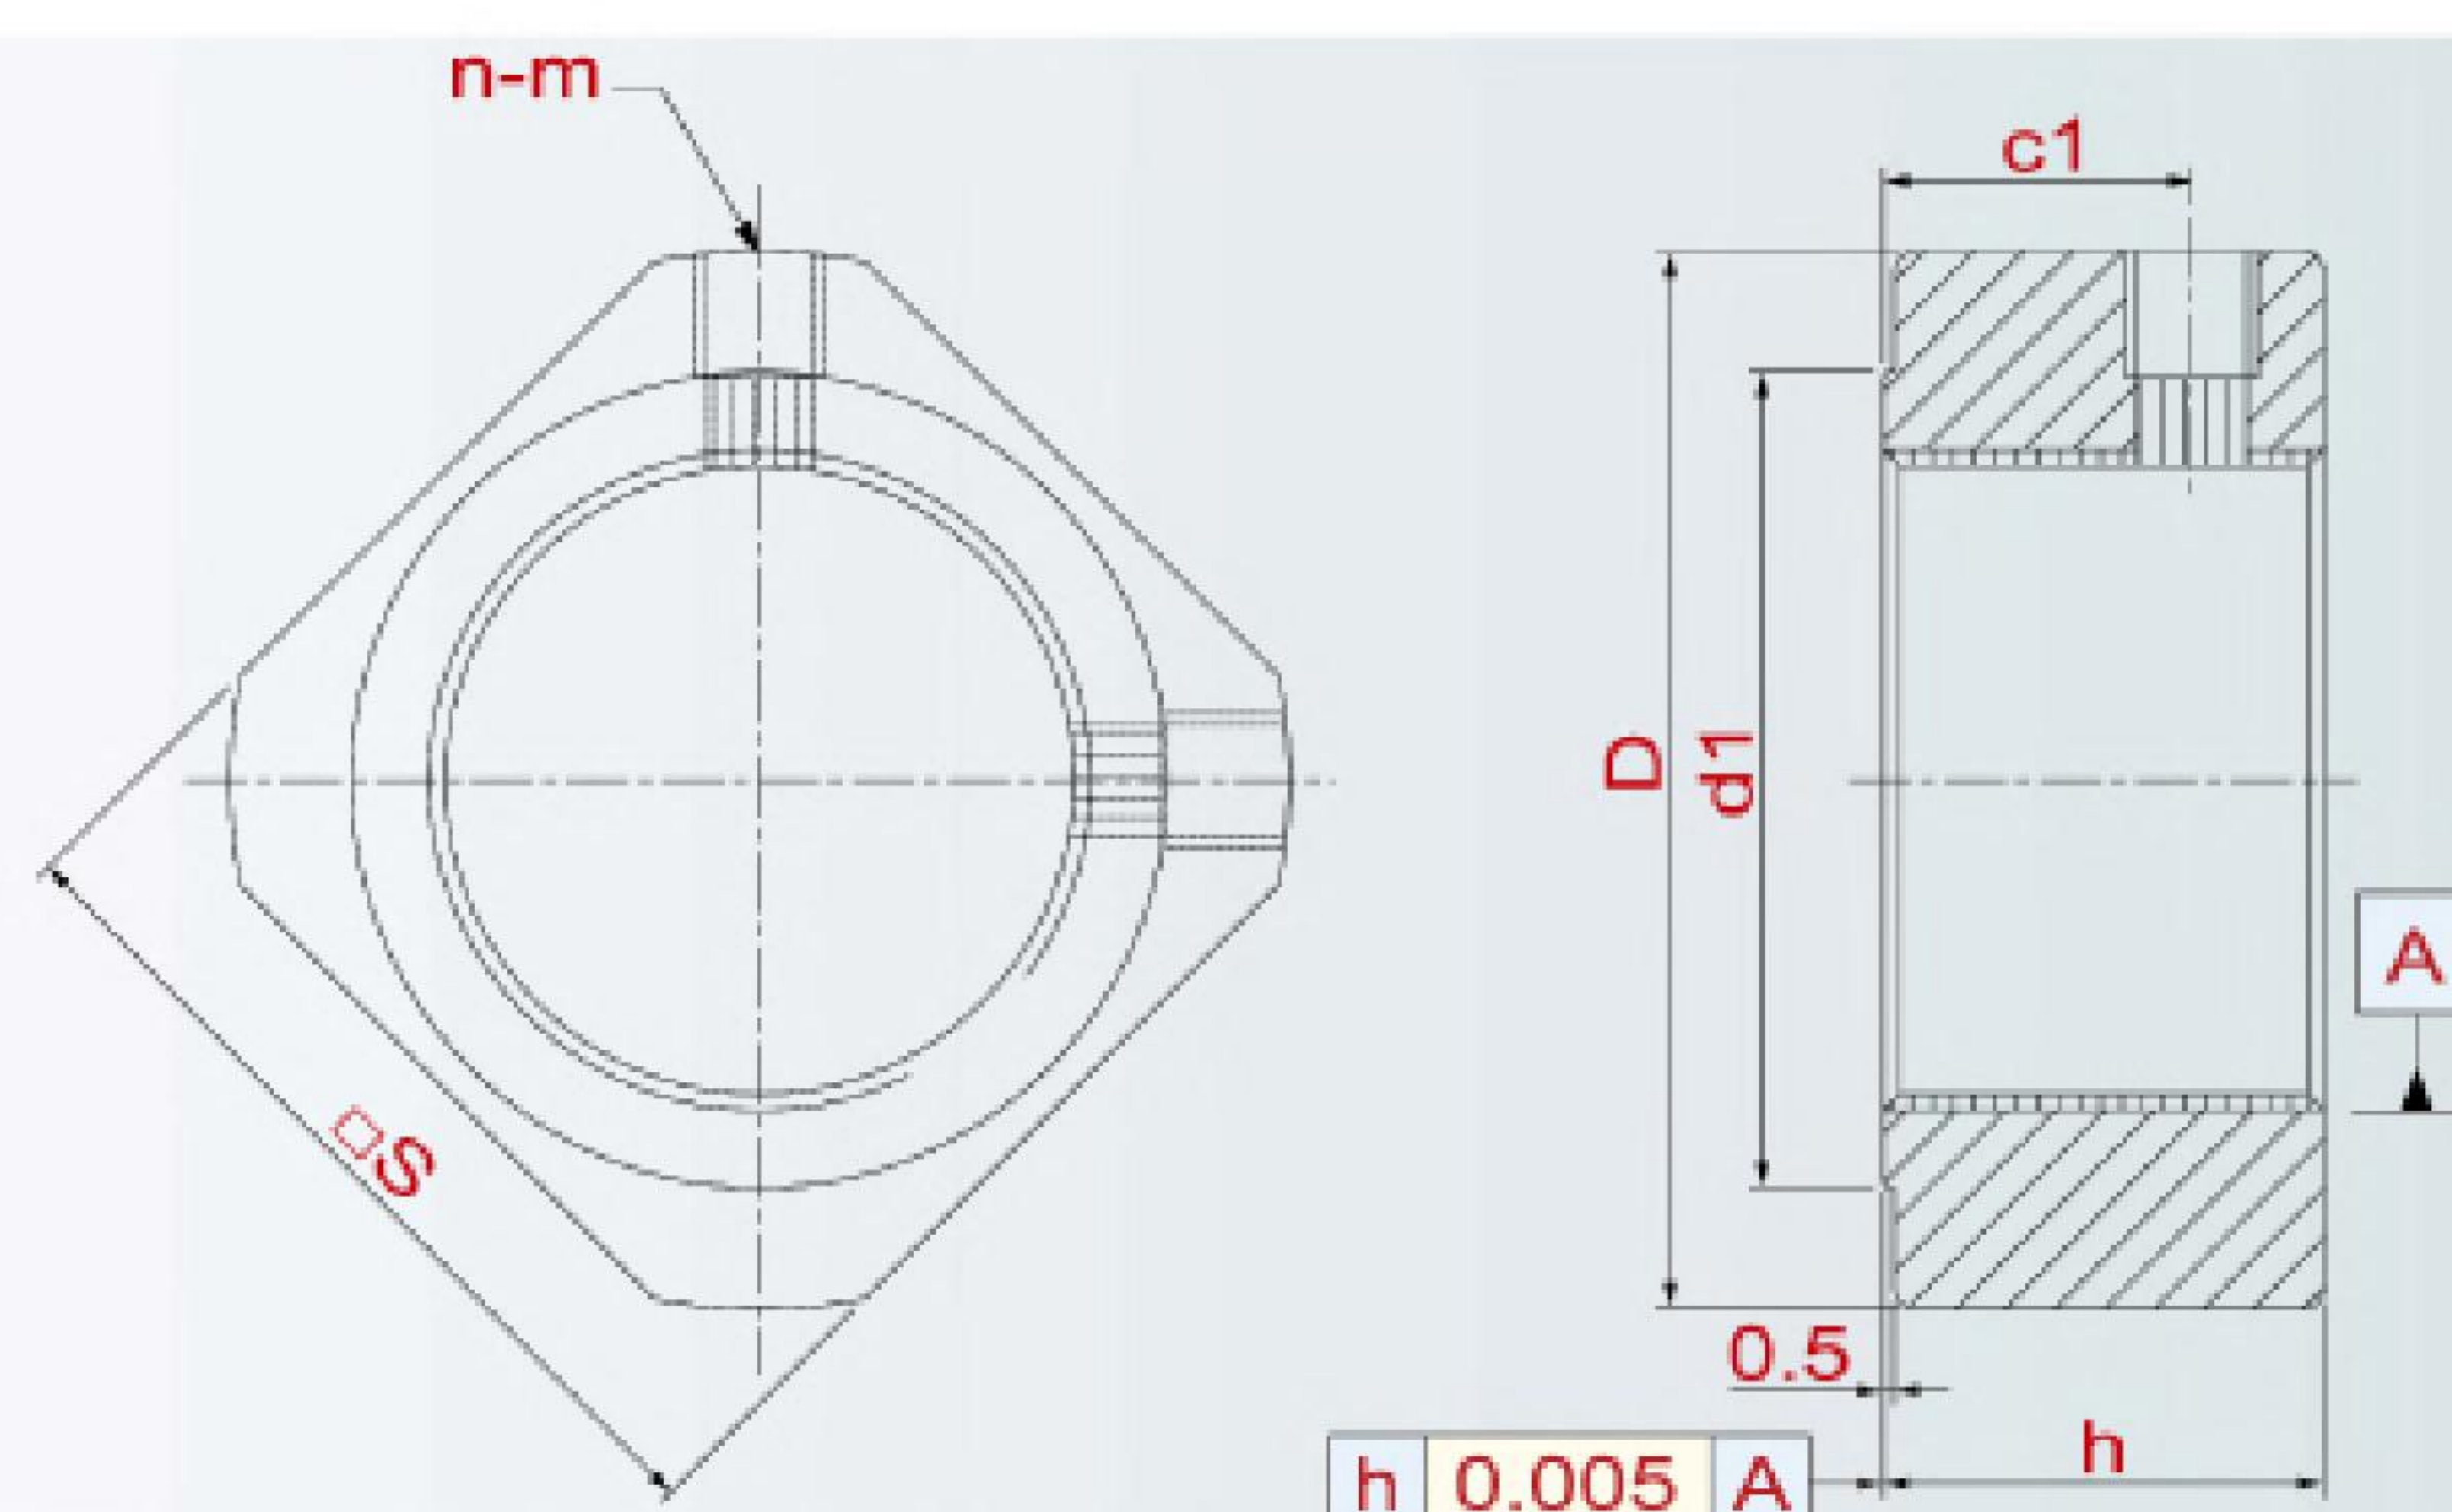

Square outer shape **YSRN** locknut , two point locking brass screws in 90° position. Suitable for bearing supporting seat. Inner threads and end surface are simultaneously machined, assuring the assembly accuracy.


- ❑ Material Composition: S45C(C45E4)
- ❑ Hardness: HRC26°~28°
- ❑ Thread Accuracy: ISO 4H
- ❑ Manufacturing Method: High Precision Turning
- ❑ Run Out: 0.005mm

[illegible]

Notes on Installation




✓ Clean the locknut with naphtha or appropriate industrial degreaser before installation.

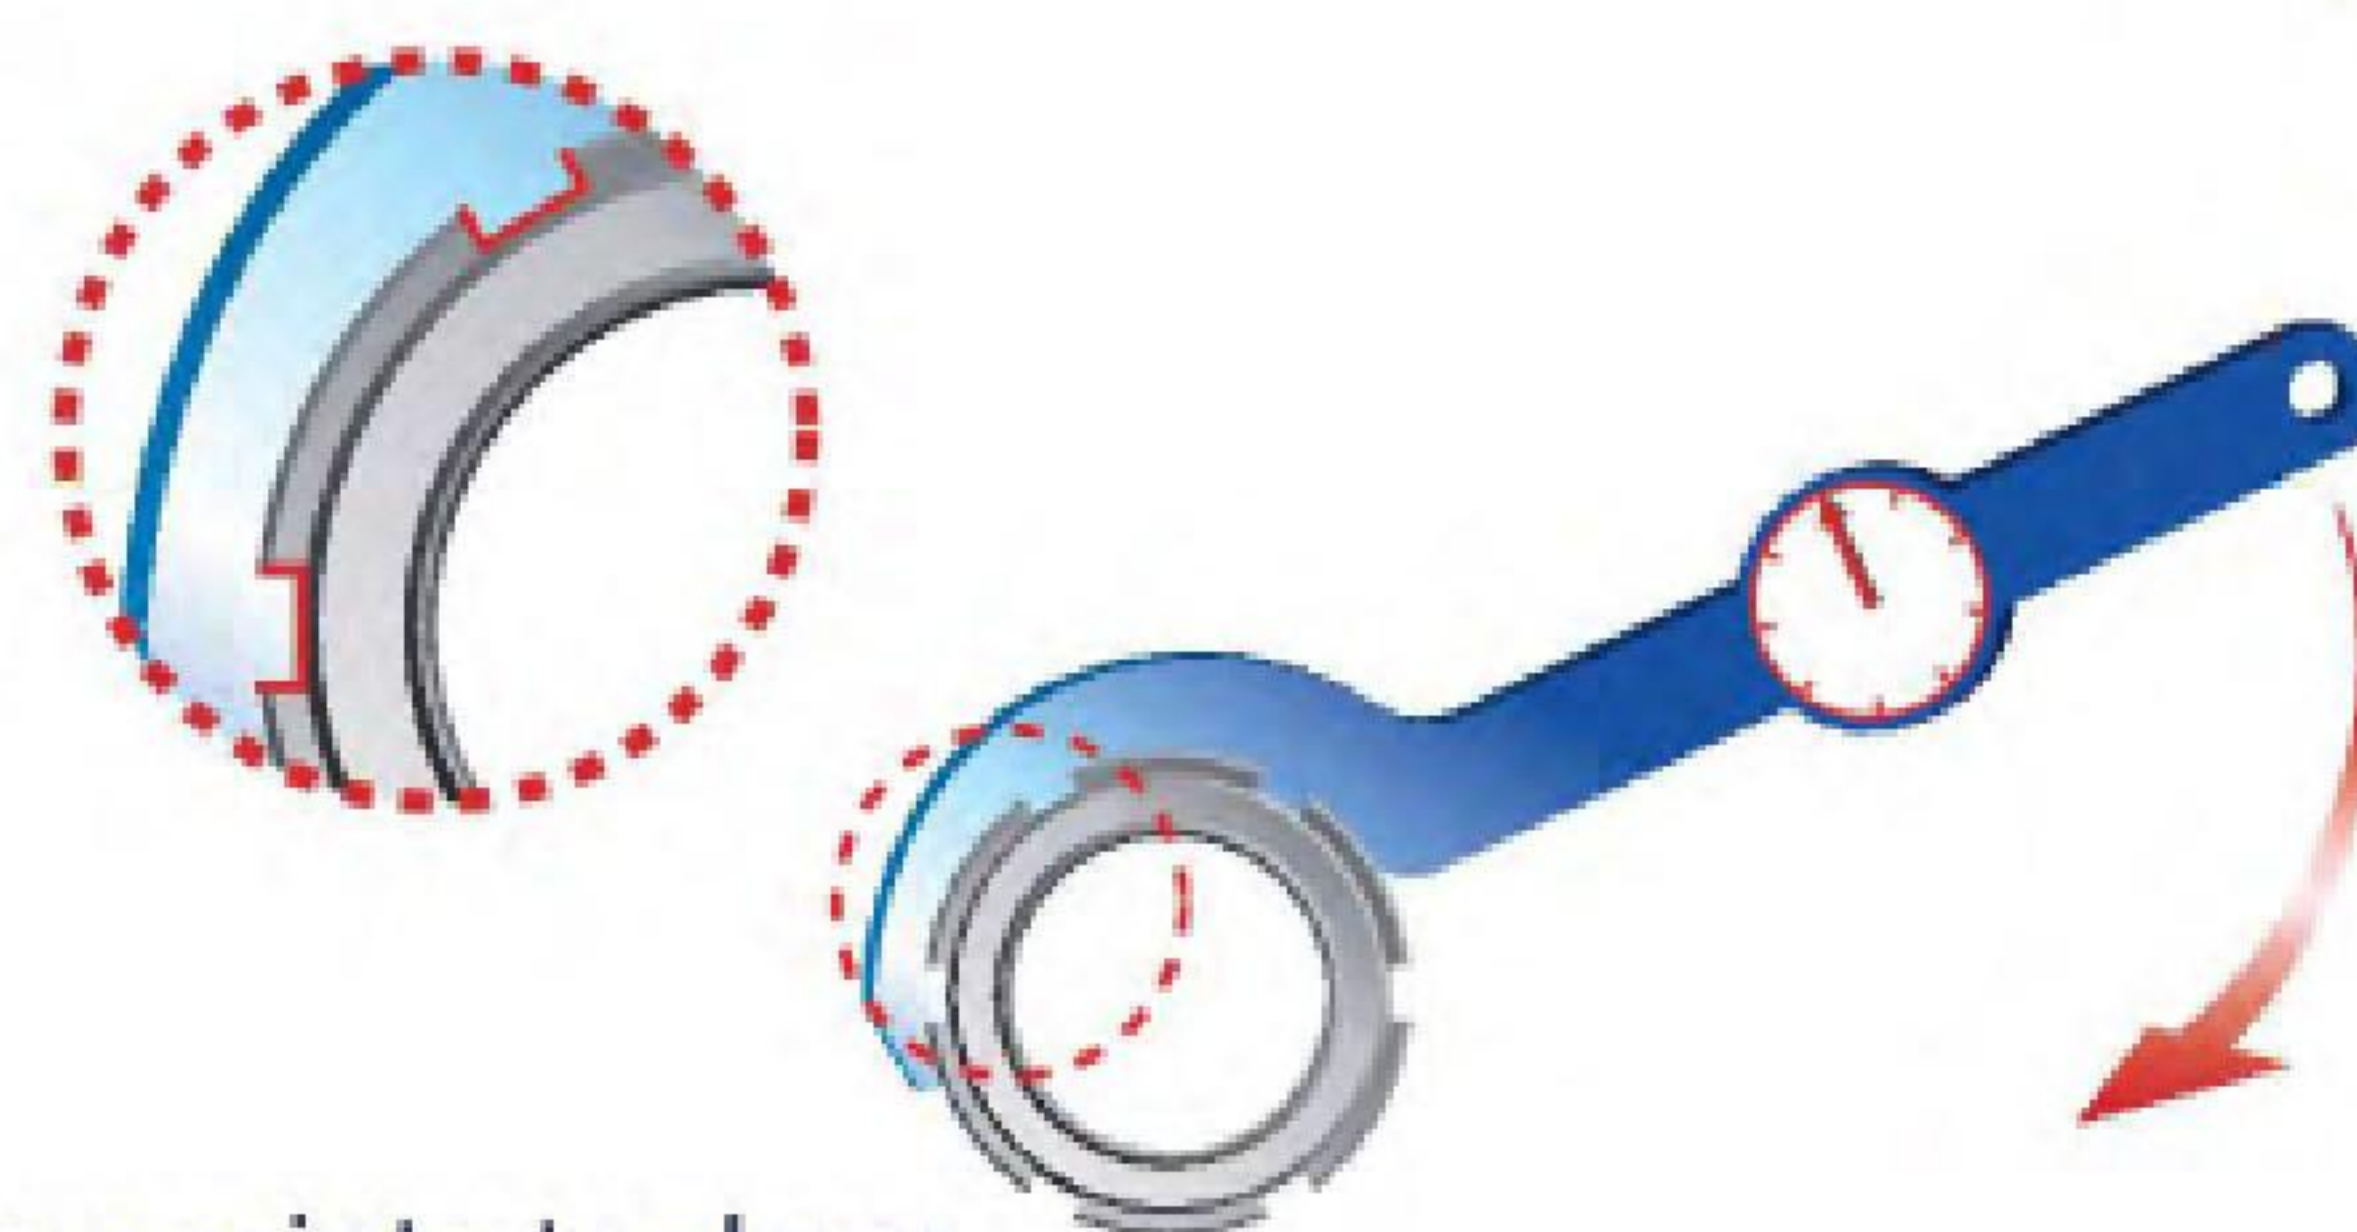

✓ Use appropriate tools or spanner to set the correct preload.



✓ Apply a small drop of lubricant to inner threads.

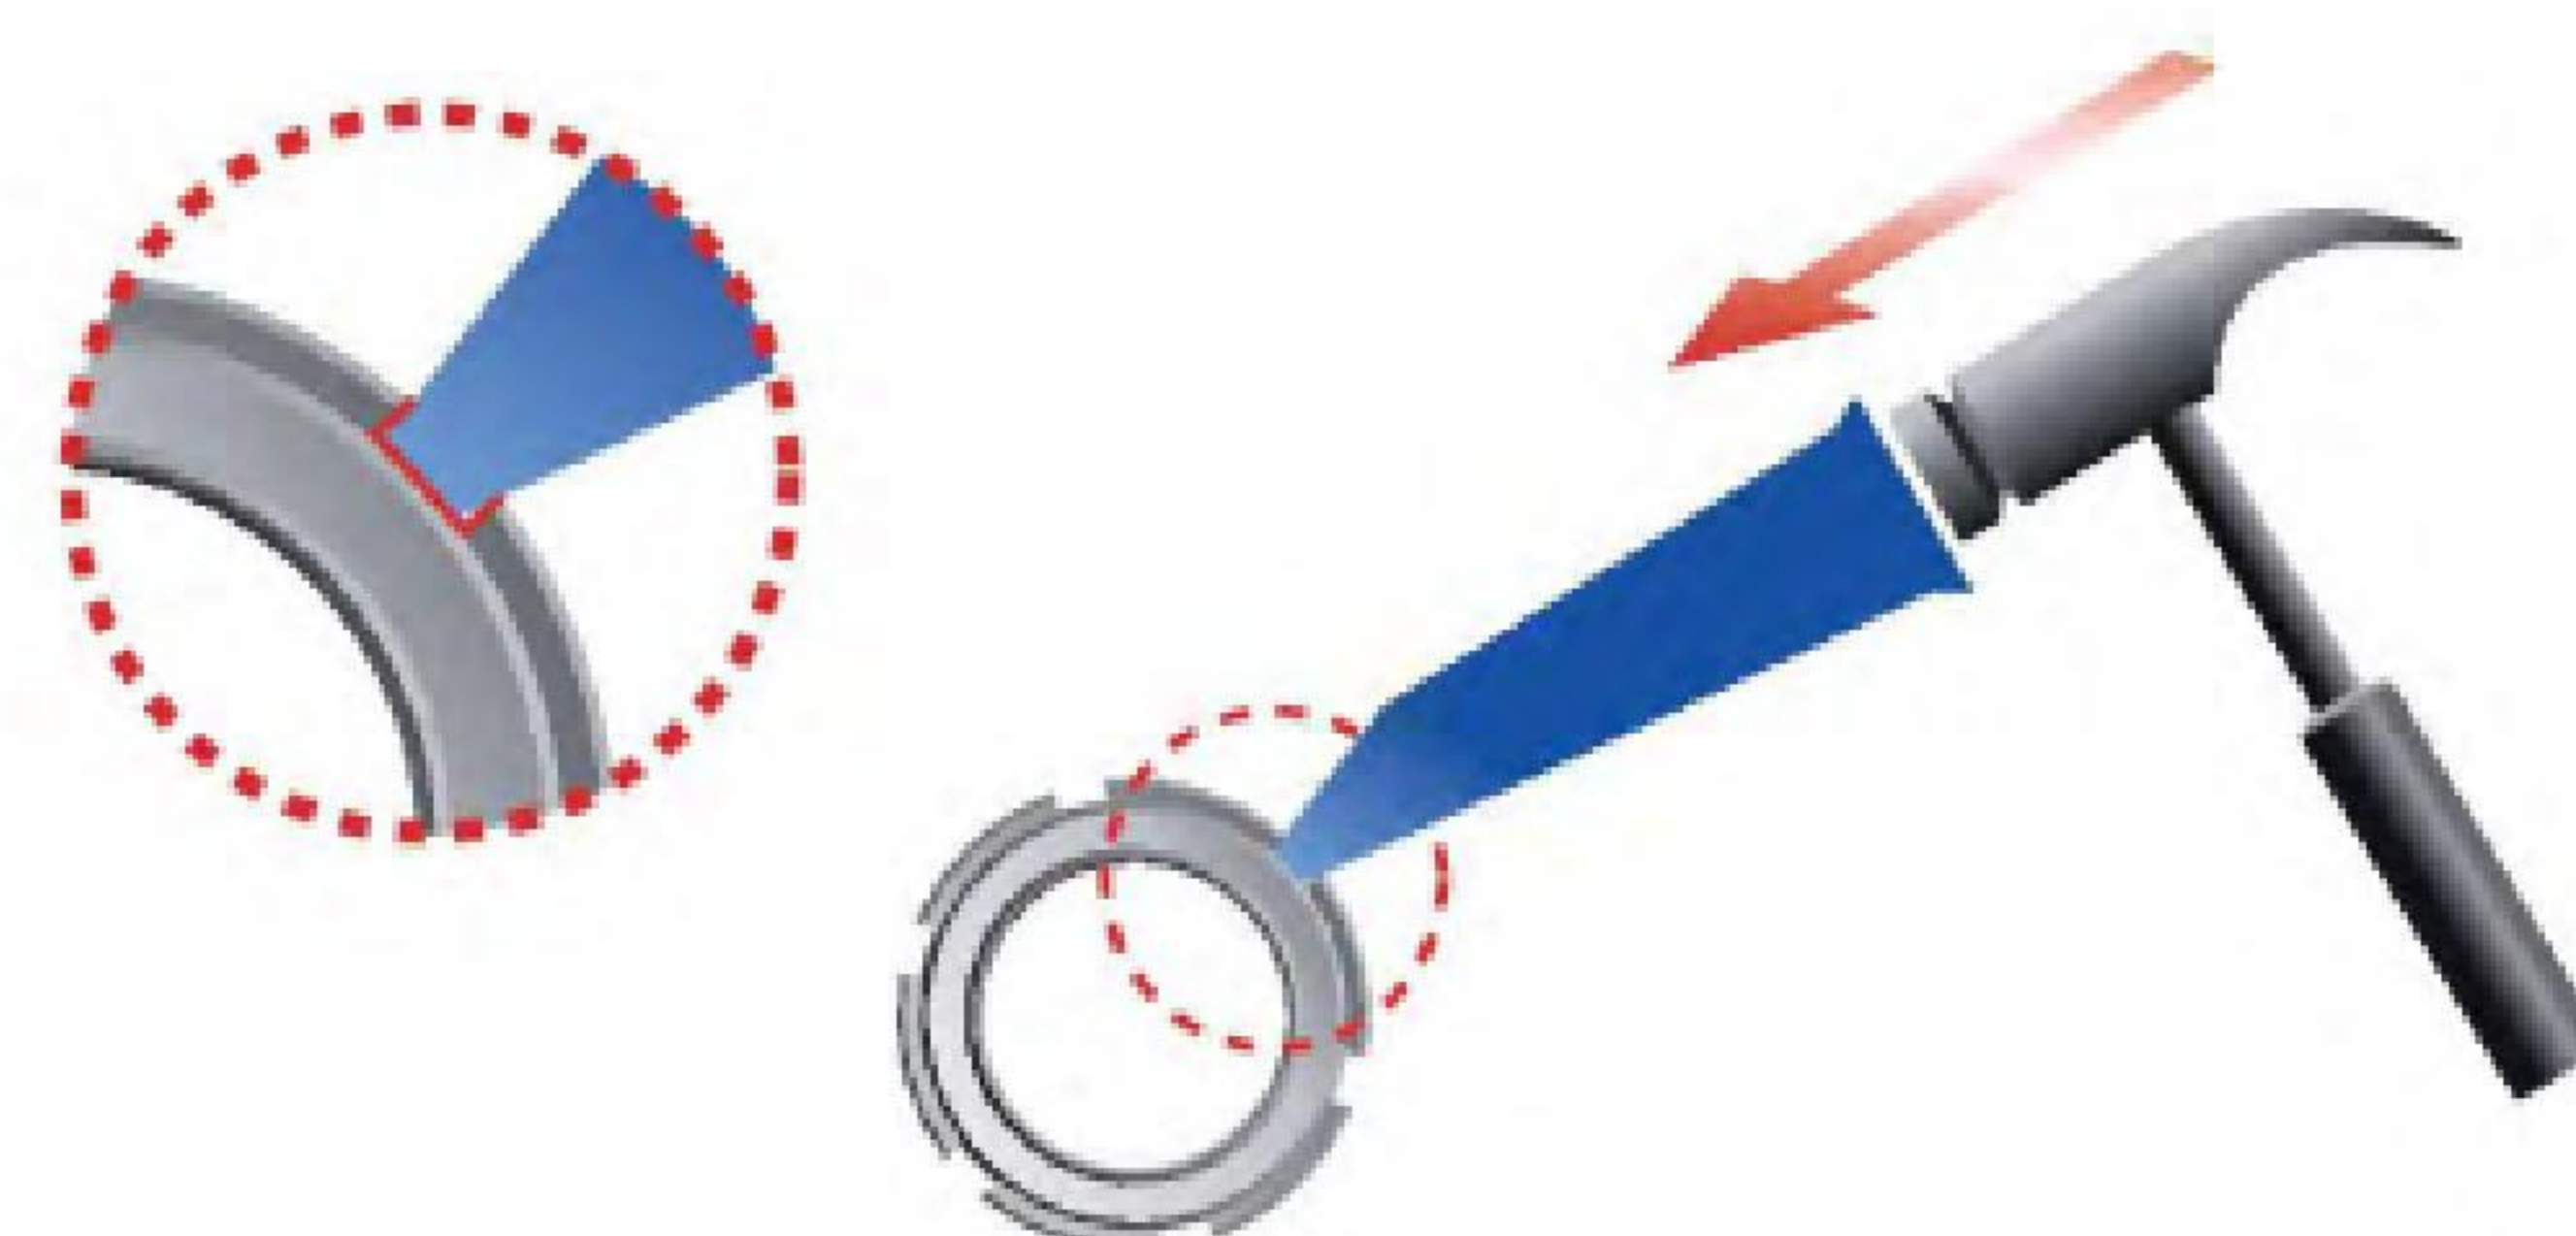


✗ Avoid applying direct pressure to any single point.


Precision Locknut Applications

 YINSH NUT


Lathe

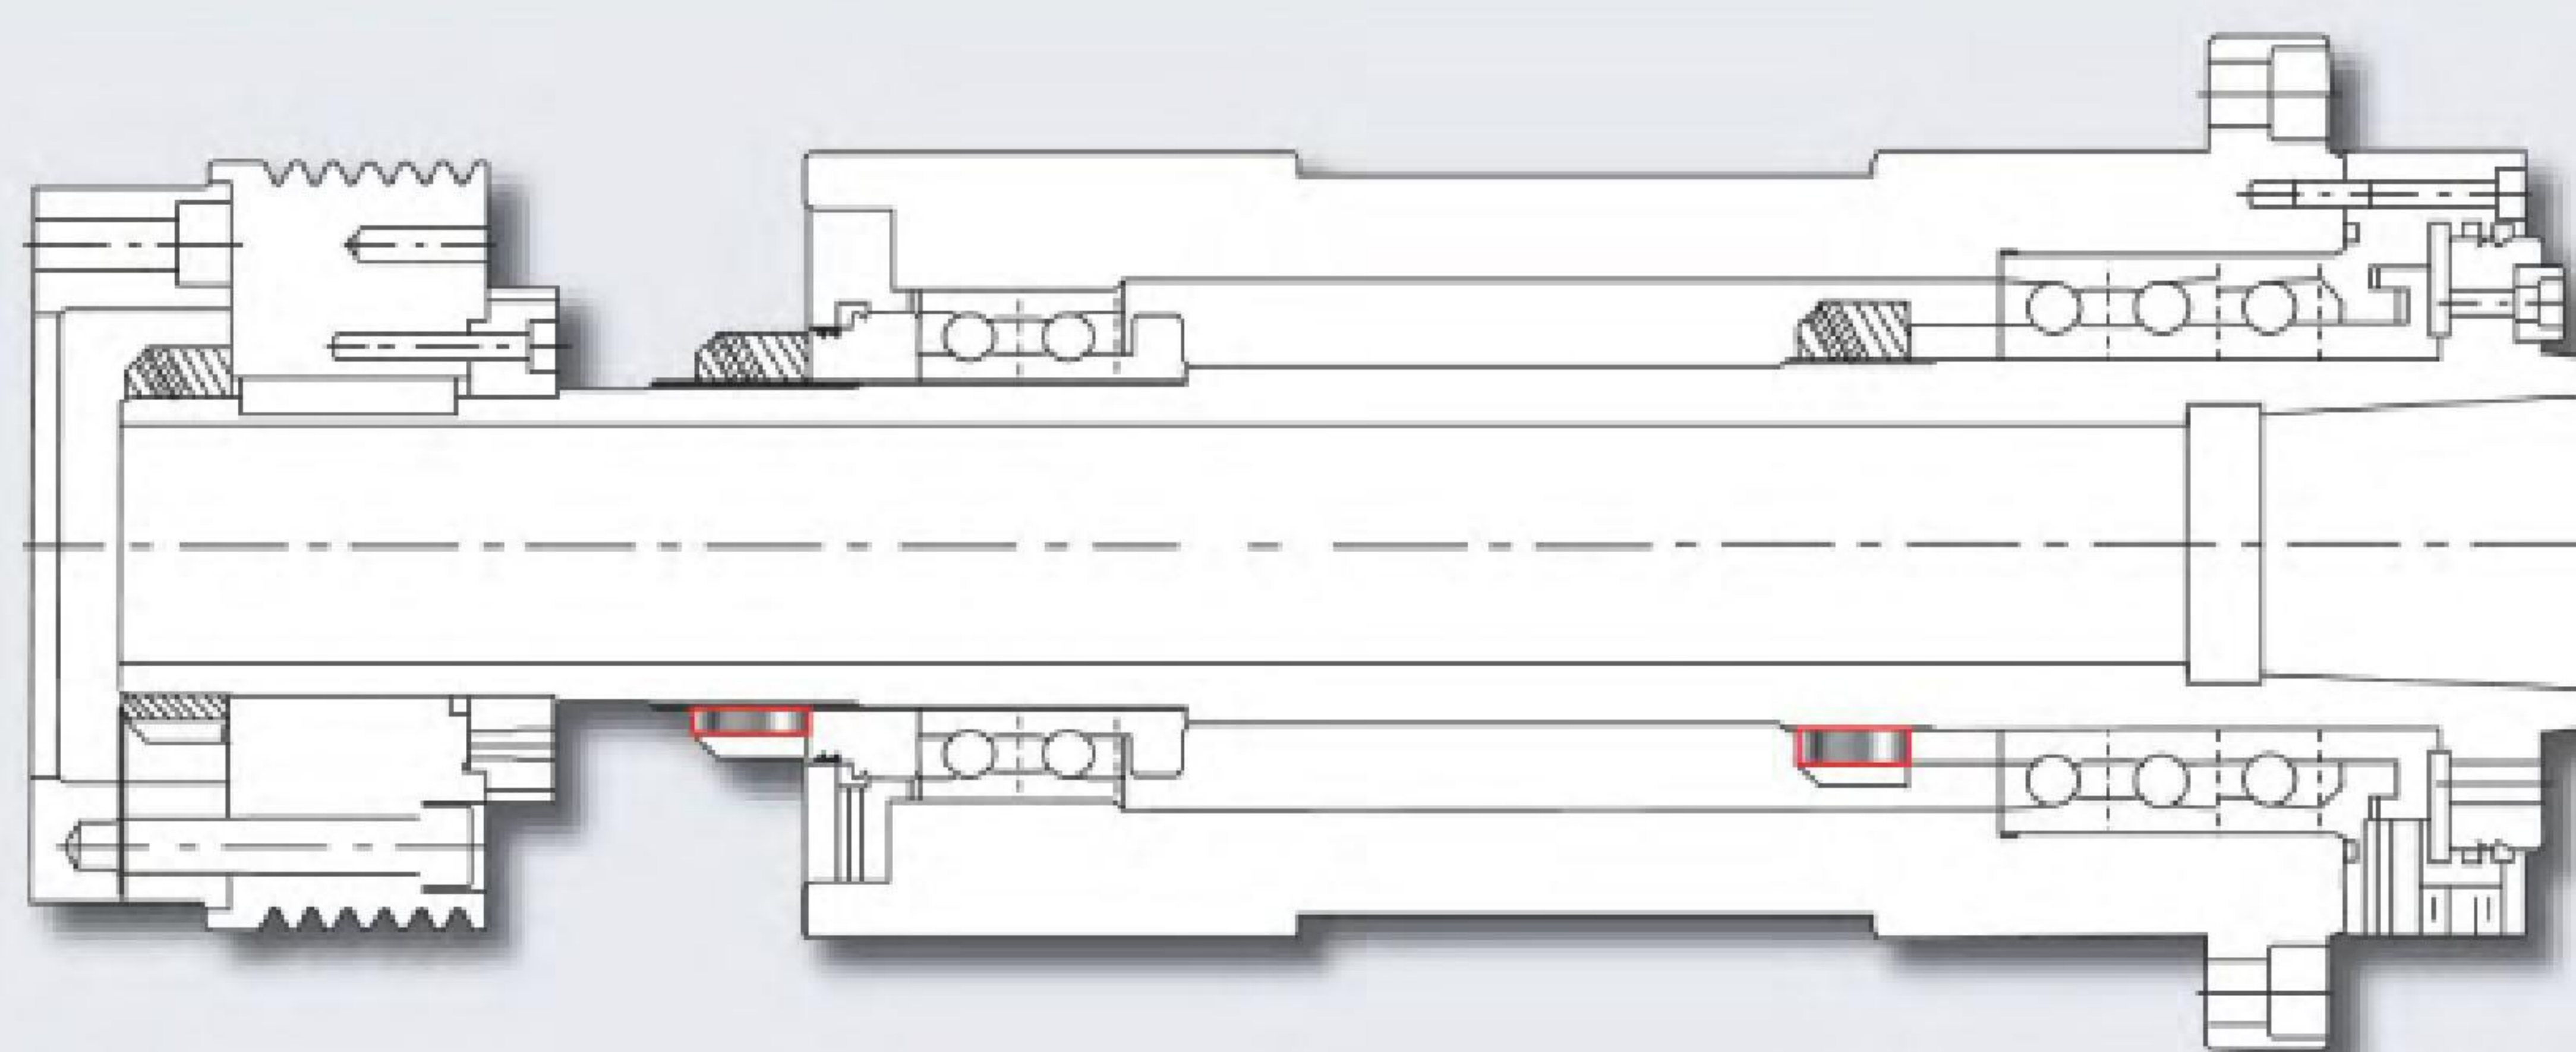


Ball Screw

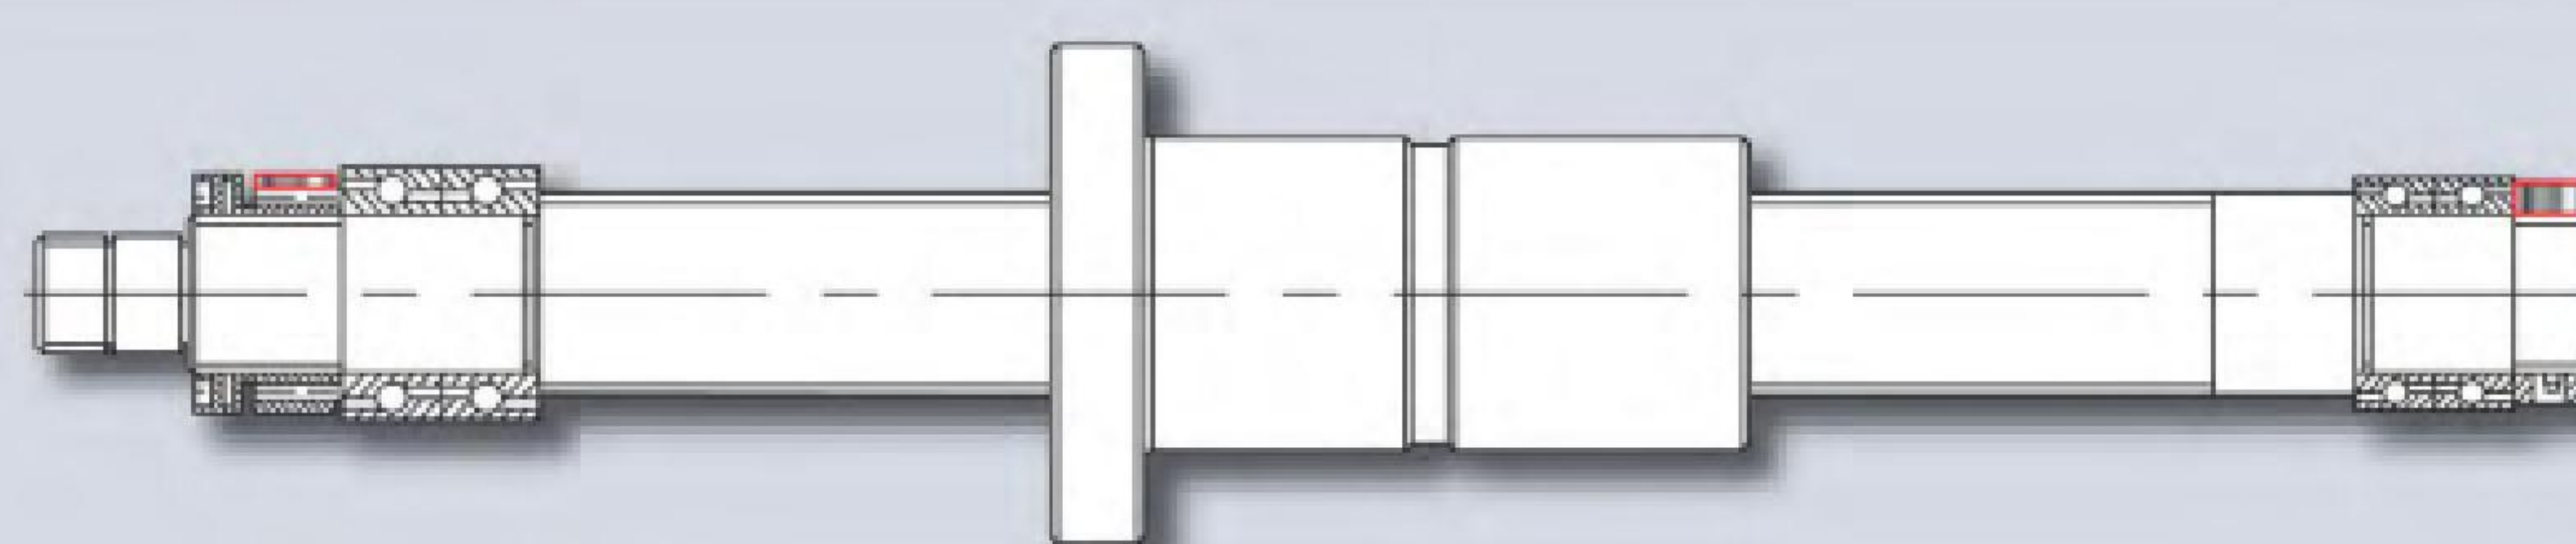

Milling Machine

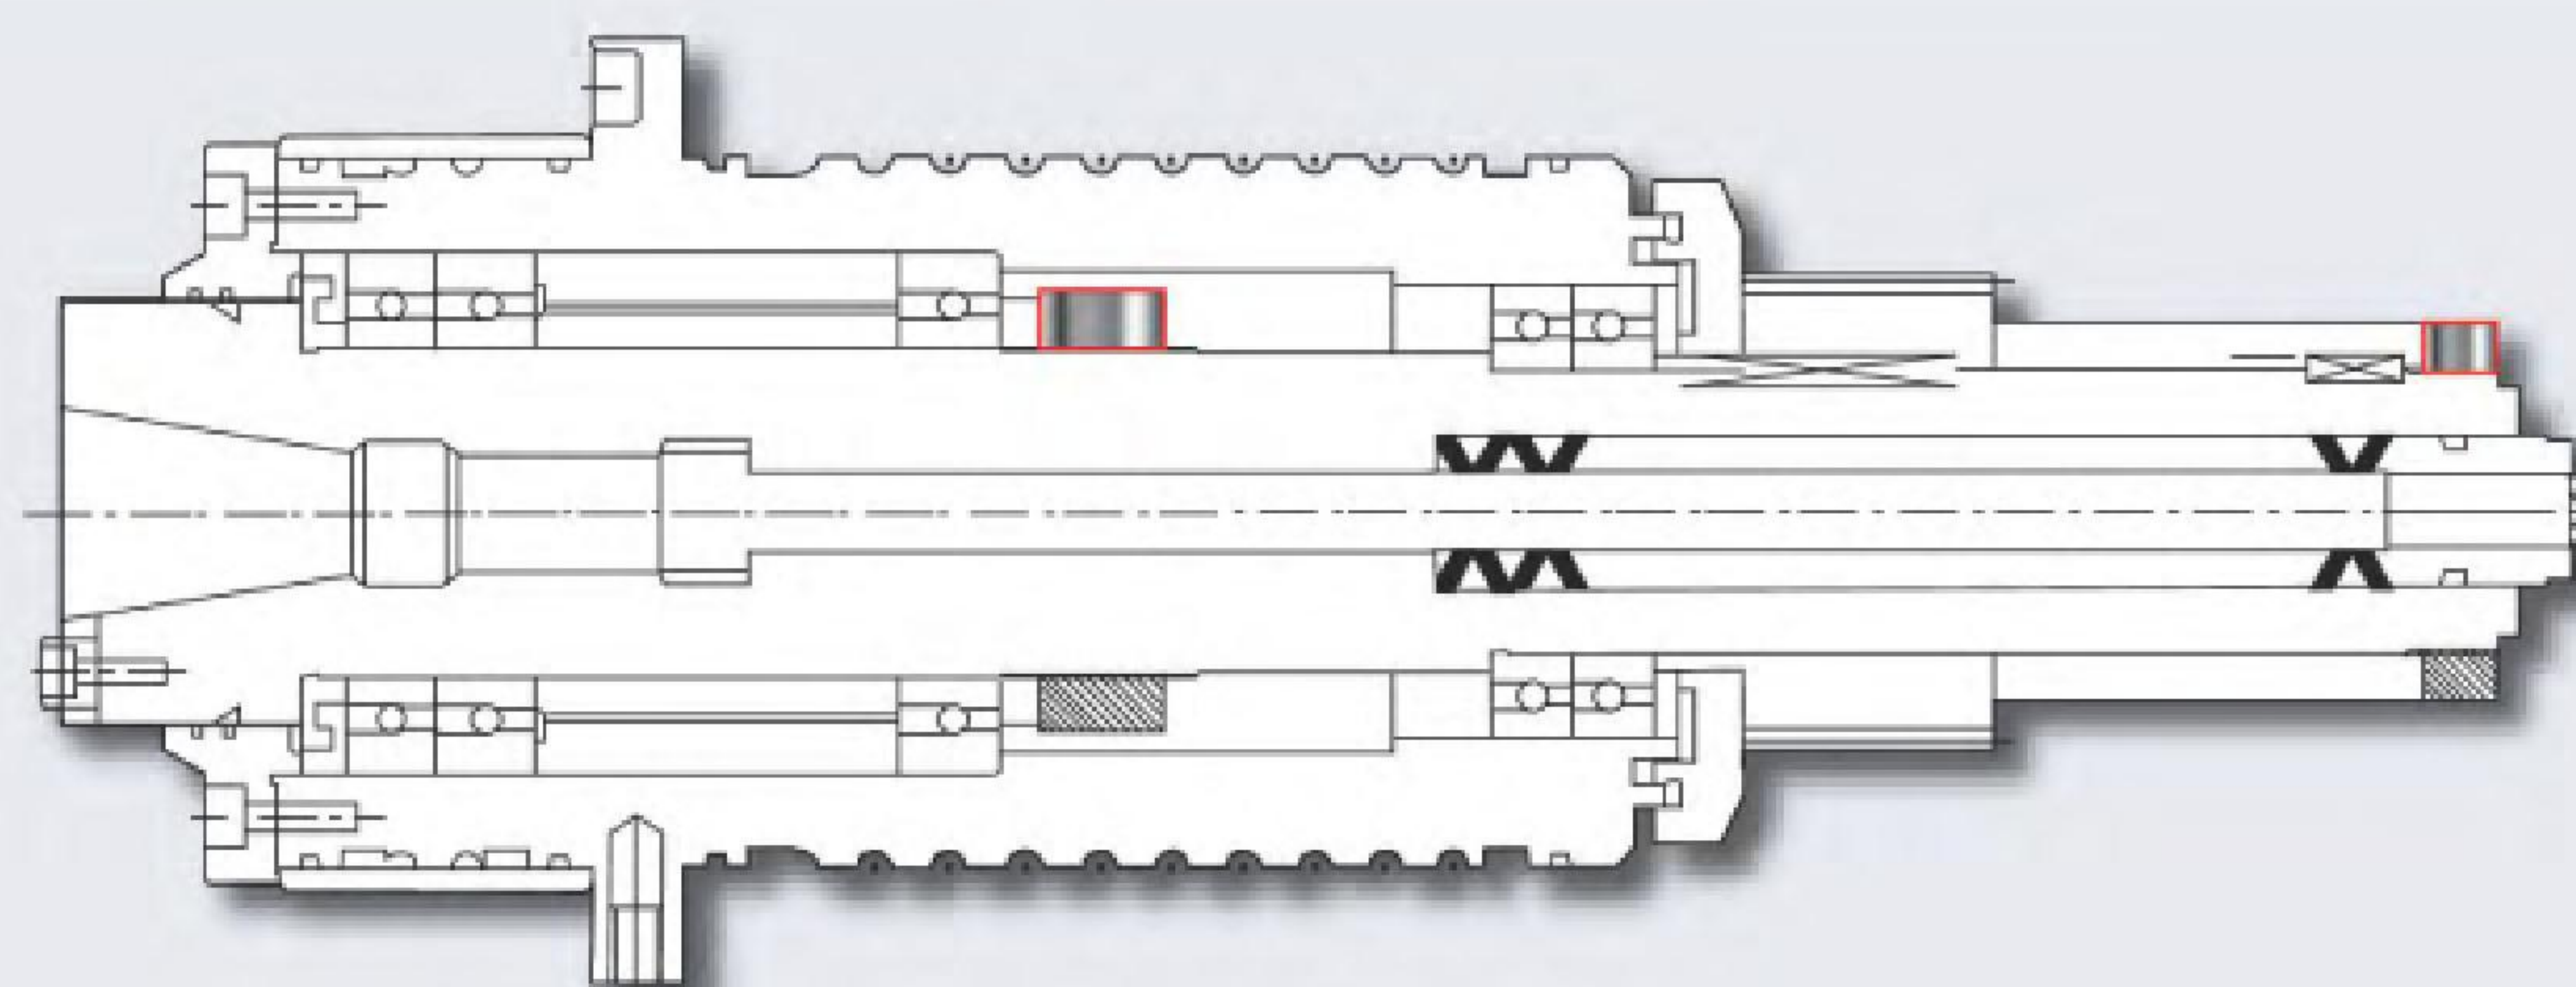

Grinder

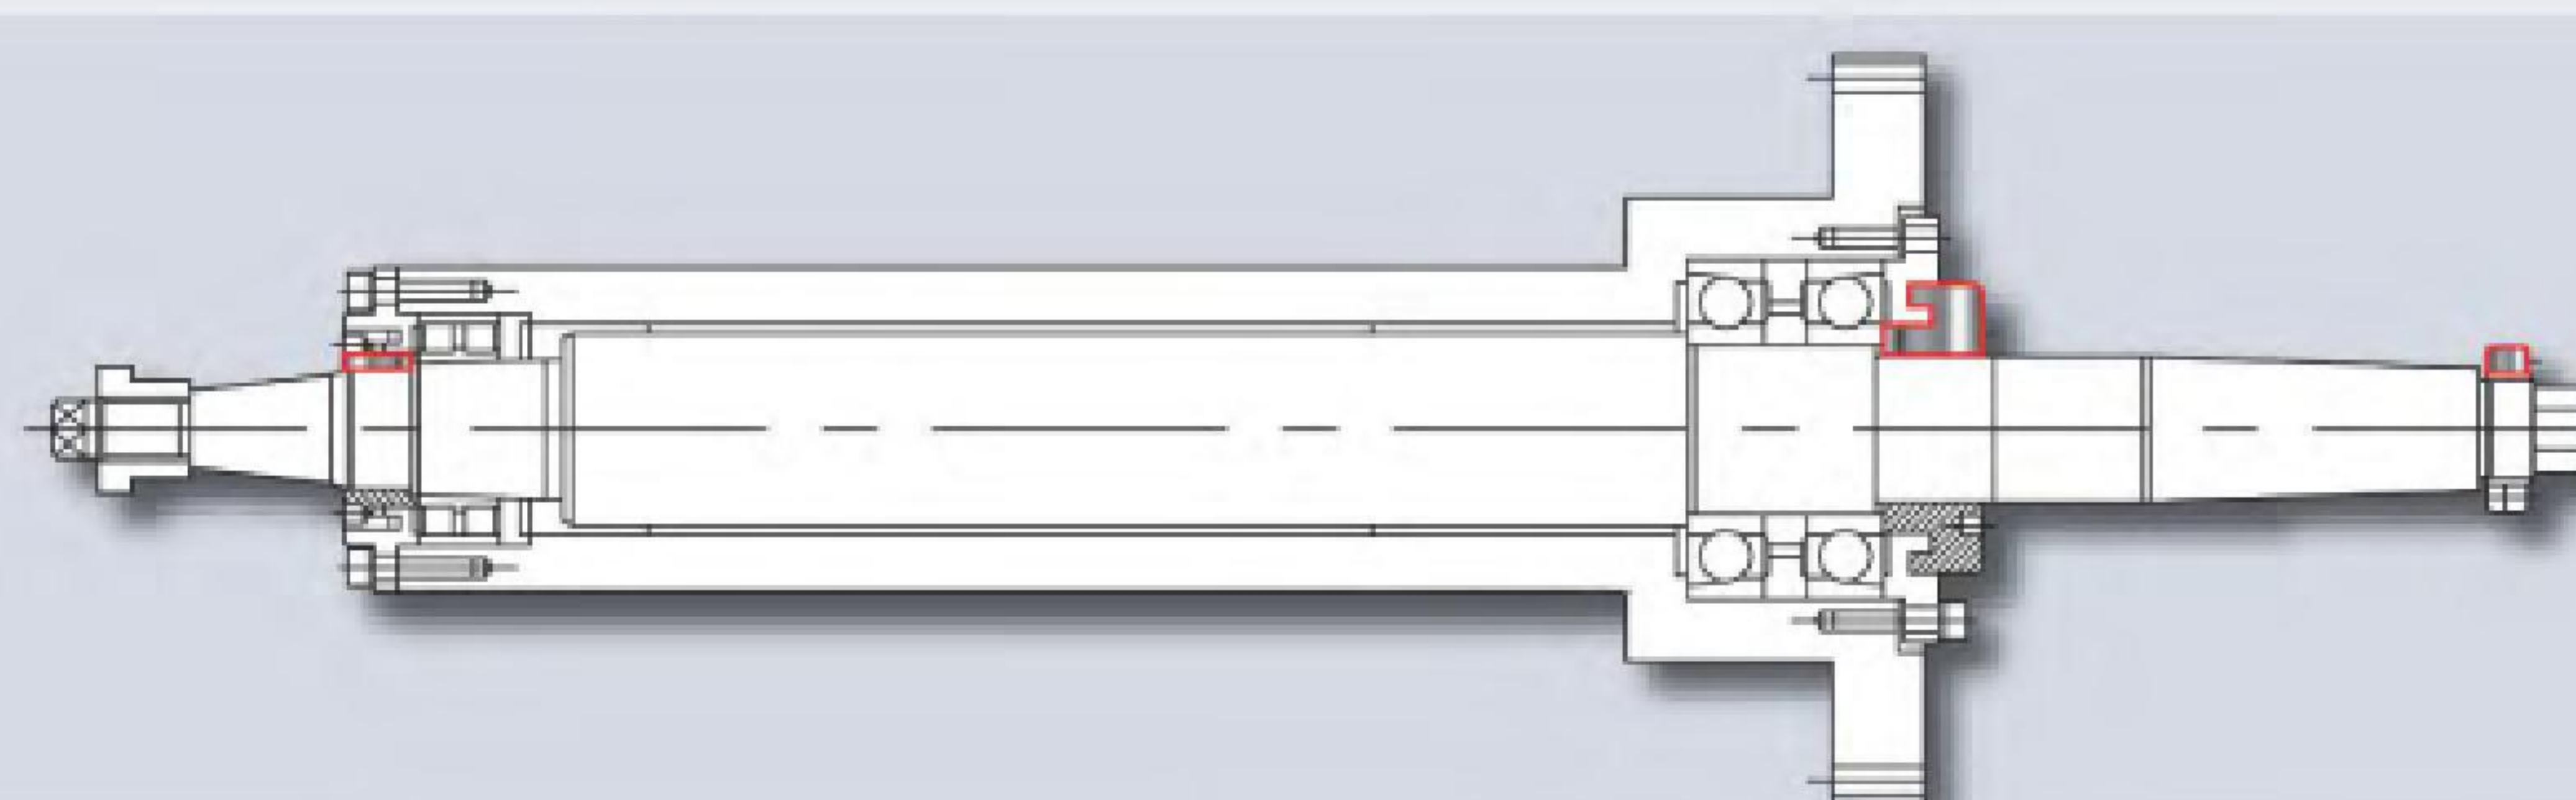



Scan Now!

YINSH PRECISION INDUSTRIAL CO., LTD.

No. 26, Lane 31, Chung Te 6 Rd., Sec. 1, Taichung, Taiwan 406

Tel: +886-4-2244-7899


E-mail: service@yinsh.com

Fax: +886-4-2245-2402

http://www.yinsh.com



**PRECISION
LOCKNUTS**

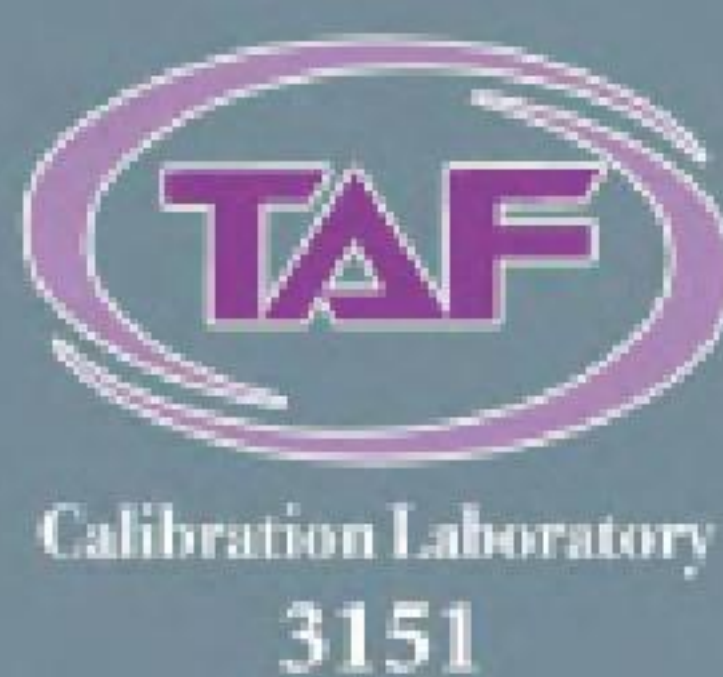

Calibration Laboratory
3151



Testing Laboratory
2867

TUV NORD
ISO9001
ISO14001
OHSAS18001



THE 21st
NATIONAL AWARD
OF OUTSTANDING SMEs



THE 63RD
NATIONAL INDUSTRIAL
INNOVATION AWARD



THE 11TH
RISING STAR AWARD



THE 10TH
NATIONAL BRAND
YUSHAN AWARD

April 2018